



导向轴

直杆型/内螺纹型 内螺纹双孔型

新增



■ 请按步骤①~⑥选择型号和参数后进行订购。

型号(①代码·②D) - ③L - ④M - ⑤W - ⑥N
AAJDJR15 - 50 - M5 - W8 - N5



型号区分:

代码


5

天发货

直杆型



代码	类型	D公差	材质	硬度	表面处理
AAAJJR	内螺纹双孔型	g6	SUJ2	高频淬火	—
AAJBJRL				有效硬化层深度见P15	镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm
AAJCSSR			SUS440C	淬火硬度	—
AAJCSSRL				GCr15 HRC56-9Cr18Mo HRC54-	镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm

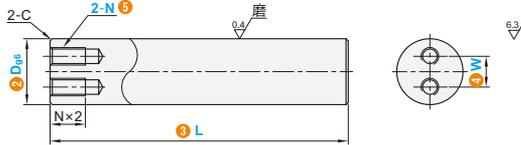


①代码	型号	②D _{g6}	③L	④W	⑤N	C	
AAAJJR AAJBJRL AAJCSSR AAJCSSRL	15	-0.006 -0.017	20-750	D-W-N≥4 W-N≥3	4	0.5	
	16		20-800		5		
	18		20-900		6		
	20		20-1000		8		
	25	-0.007 -0.020	20-1200		10	1.0	
	30		20-1500		12		
	35				-0.009 -0.025		12
	40						
	50						

内螺纹型



代码	类型	D公差	材质	硬度	表面处理
AAJDJR	内螺纹双孔型	g6	SUJ2	高频淬火	—
AAJEJRL				有效硬化层深度见P15	镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm
AAJFSSR			SUS440C	淬火硬度	—
AAJGSSRL				GCr15 HRC56-9Cr18Mo HRC54-	镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm

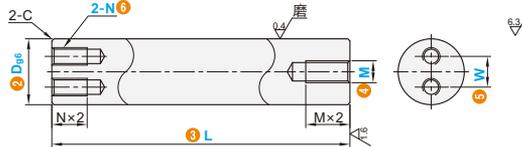

①代码	型号	②D _{g6}	③L	④M	⑤W	⑥N	C
AAJDJR AAJEJRL AAJFSSR AAJGSSRL	15	-0.006 -0.017	20-750	4 5 6 8 10	D-W-N≥4 W-N≥3	4	0.5
	16		20-800	4 5 6 8 10		5	
	18		20-900	4 5 6 8 10 12		6	
	20		20-1000	4 5 6 8 10 12		8	
	25	-0.007 -0.020	20-1200	4 5 6 8 10 12 16		10	1.0
	30		20-1500	6 8 10 12 16 20		12	
	35			8 10 12 16 20 24		10	
	40			10 12 16 20 24 30		12	
	50	12 16 20 24 30					



型号(①代码·②D) - ③L - ④M - ⑤W - ⑥N - (LKC...etc.)
AAAJJR16 - 50 - M5 - W8 - N5 - LKC

代码	变更L尺寸公差	技术说明
LKC		选型方法 LKC ①最小单位:0.1 ②L < 300 变更为 L±0.03; ③300 ≤ L < 600 变更为 L±0.05; ④L ≥ 600 变更为 L±0.1

代码	变更内螺纹为细牙螺纹	技术说明																
MSC()		选型方法 MSC14 <table border="1"> <thead> <tr> <th>D</th> <th>MSC</th> </tr> </thead> <tbody> <tr><td>15-16</td><td>8 10</td></tr> <tr><td>18</td><td>8 10 12</td></tr> <tr><td>20</td><td>8 10 12 14</td></tr> <tr><td>25-30</td><td>8 10 12 14 18</td></tr> <tr><td>40</td><td>8 10 12 14 18</td></tr> <tr><td>50</td><td>8 10 12 14 18</td></tr> <tr><td>螺距</td><td>1.0 1.25 1.5</td></tr> </tbody> </table> ①选型时, 须将M变更为MSC。 ②选型时, M与MSC须变为相同尺寸。 ③直杆型不适用。	D	MSC	15-16	8 10	18	8 10 12	20	8 10 12 14	25-30	8 10 12 14 18	40	8 10 12 14 18	50	8 10 12 14 18	螺距	1.0 1.25 1.5
D	MSC																	
15-16	8 10																	
18	8 10 12																	
20	8 10 12 14																	
25-30	8 10 12 14 18																	
40	8 10 12 14 18																	
50	8 10 12 14 18																	
螺距	1.0 1.25 1.5																	

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613