



型号 ① 代码 · ② d — ③ F — ④ h
AIED15 — 60S — 30

■ 请按步骤①~④选择
型号和参数后进行订购。



型号区分:
代码 5 天发货

滚珠丝杠
组件

09






代码	类型	材质	表面处理
		①③④⑥	①③④⑥
AIED	整合型传动座 宽型	铸铁	发黑

■ 构成零件


编号	零件名称	数量
①	传动座本体	1
②	轴承	1组
③	压板	1
④	间隔环	2
⑤	油封	2
⑥	锁紧螺母	1组

① 使用之轴承经预压处理，轴向0间隙。

① 轴承采用P5配对DF组装，最适宜滚珠丝杠使用。

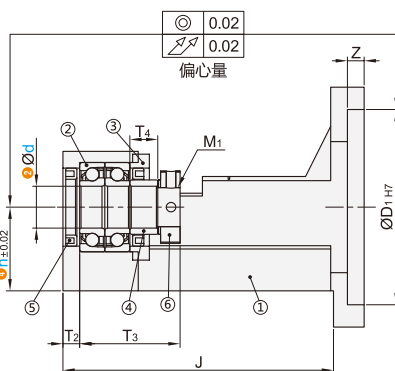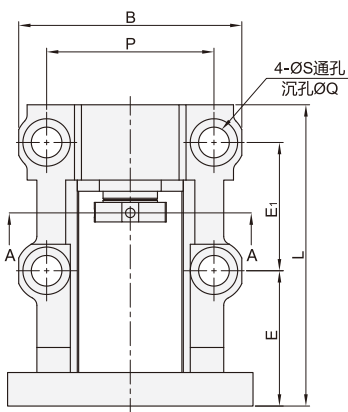

剖面B-B



剖面A-A

型号				适用 电机类型	ØD ₁	P.C.D	M	Z	B	P	L	J	E	E ₁	S	Q	H	H ₁	W ₁	T ₁	T ₂	T ₃	T ₄	M ₁	建议丝杠支座	建议电机规格			
代码	适用丝杠规格	适用电机法兰中心高	支撑侧																						止口规格	安装P.C.D			
AIED	15	60	30	伺服电机	50	70	M5	6	80	60	108	97	48.5	46	11	17	50	35 36	40	22	6	36	10	M15×1.0	AIUN15 AIUNA15	50	70		
		60S	32				M4										52	37											
		60	32				M5										52	37											
		80	30				M4										50	38											
		80S	32				M5										52	37											
		80S	32				M6										52	37											
		57	30	步进电机	38.1	66.7	M4				108	97	48.5				50	39							AIUN15	38.1	66.7		
		30	32				M5										52	37											
		86	30				M6										50	35							AIUN15			73	98.4
		32	32				M5										52	37							—				

① *带S为松下电机，不带为其它品牌电机。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达