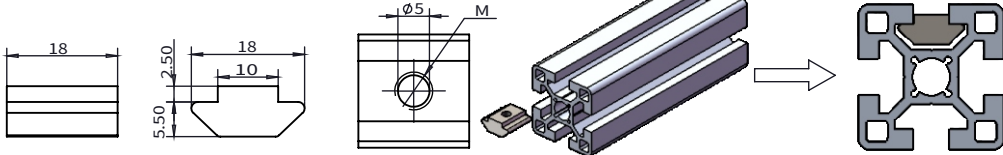


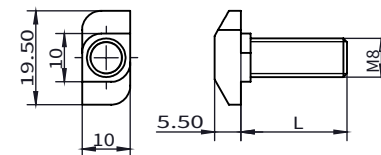




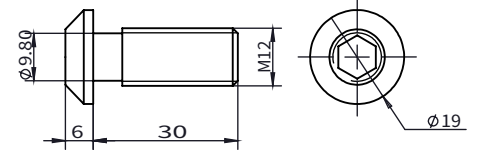


日标40型材用配件

紧固部分

日标槽宽10-40系列

代码	类型	材质	表面处理	安装使用示例		选型示例： HA31-HS-4010-M5 HA31-HS-4010-M6 HA31-HS-4010-M8 HA32-HS-4010-M5 HA32-HS-4010-M6 HA32-HS-4010-M8
HA31-HS-4010 HA32-HS-4010	滑块螺母	碳钢	镀锌 镀镍			
槽口	型号		材质	表面处理	重量(g)	用途
	HA31-HS-4010-M5		碳钢	镀锌	15.4	用于槽宽为10mm的日标型材与配件连接紧固。滑块螺母只能从型材端面的槽口处放入槽内,无法定位。但连接强度高,可靠性好,用于型材高强度连接。
	HA31-HS-4010-M6				14.6	
	HA31-HS-4010-M8				13.5	
	HA32-HS-4010-M5			镀镍	15.4	
	HA32-HS-4010-M6				14.6	
	HA32-HS-4010-M8				13.5	

代码	类型	材质	表面处理	安装使用示例		选型示例： HA32-TB-4010-M8-L20 HA32-TB-4010-M8-L25 HA32-TB-4010-M8-L30 HA32-TB-4010-M8-L35	
HA32-TB-4010	T型螺栓	碳钢	镀镍				
  							
槽口	型号	材质	表面处理	重量(g)	用途		
	HA32-TB-4010-M8-L20	碳钢	镀镍	13.0	用于槽宽为10mm的日标型材与配件连接紧固。将T型螺栓从型材槽口处直接放入槽内,旋转90°,然后用法兰螺母拧紧即可锁定定位。安装方便。		
	HA32-TB-4010-M8-L25			14.5			
	HA32-TB-4010-M8-L30			16.2			
	HA32-TB-4010-M8-L35			19.1			

代码	类型	材质	表面处理	安装使用示例		选型示例: HA31-YB-4010-M12-L30
HA31-TB-4010	圆头螺栓	碳钢	镀锌	   		
槽口	型号	材质	表面处理	重量(g)	用途	
	HA31-YB-4010-M12-L30	碳钢	镀锌	33.6	用于槽宽为10mm的两根日标型材相互垂直连接。一根型材的中心孔需攻螺纹,另一根型材一端需开扳手孔。	

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613