



固定环

紧凑型



止动螺丝固定型

■紧凑型



代 码	材质	表面处理	附件
ACCJ	S45C	发黑	2个止动螺丝
ACPCJ		无电解镀镍	2个止动螺丝(SUS)
ACSCJ	SUS304	—	

25/(6.3/)

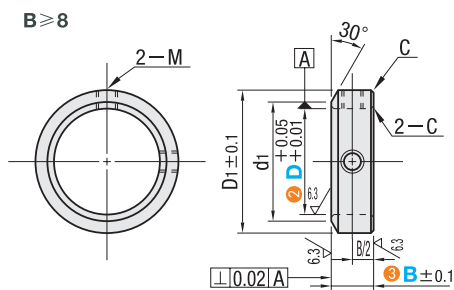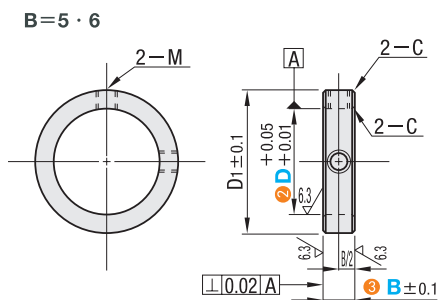

1 代码 2 D — 3 B
ACCJ20 — 6

■请按步骤①~③选择型号和参数后进行订购。



型号区分：
代码 7 天发货

型号		3 B 选择	D ₁	d ₁	C	止动螺丝 M×长度
1 代 码	2 D					
(紧凑型) ACCJ ACPCJ ACSCJ	5	5	11	—	0.2	M3×3
	6	5	12	—	0.2	M3×3
	8	5	14	—	0.2	M3×3
	10	5	16	—	0.2	M3×3
	12	5	19	—	0.5	M3×3
	15	5	22	—	0.5	M3×3
	20	6	27	—	0.5	M4×3
	8			22.5		
	25	8	32	27.5	0.5	M4×3
	10					
	30	10	39	32.5	1	M5×4
	35	10	44	37.5	1	M5×4
	40	12	46			M6×5
		15	51	42.5	1	M5×4
		18	53			M6×5

紧凑型比较表

D	紧凑程度的差值		紧凑型		标准型	
	B(壁厚)	D ₁ (外径)	B(壁厚)	D ₁ (外径)	B(壁厚)	D ₁ (外径)
3	-1	0	5	7	6	7
4	-1	0	5	8	6	8
5	-1	0	5	11	6	11
6	-1	0	5	12	6	12
8	-1	0	5	14	6	14
10	-1	0	5	16	6	16
12	-1	-1	5	19	6	20
15	-3	-2	5	22	8	24
20	-4	-5	6	27	10	32
25	-4	-6	8	32	12	38
30	-5	-7	10	39	15	46
35	-5	-6	10	44	15	50
40	-5	-9	15	51	20	60

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613