




导向轴支座

L型 止动螺丝型



代码		材质	表面处理	附件
H选择型	H指定型			
ABSKLB	ABDZCH	S45C	发黑	1个内六角螺栓
ABSKLM	ABEACN		无电解镀镍	
ABDYS	ABEBS	SUS304	—	1个内六角螺栓 (SUS)
ABSKLA	ABECLB	铝合金	本色阳极氧化处理	

$\sqrt[25]{\sqrt[6.3]{\sqrt[1.6]{}}}$

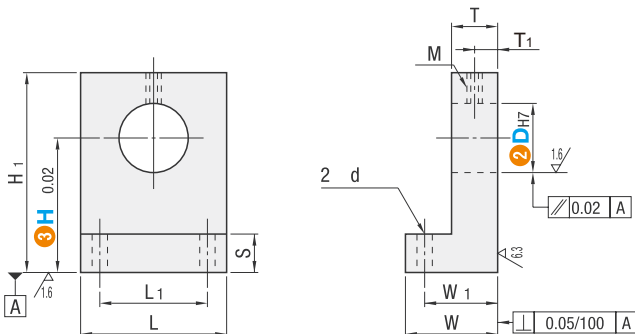

①代码 — ③H
ABSKLM8 — **25**

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分：**7**天发货
 代码

型号		③H		L	H ₁	T	T ₁	S	W	W ₁	M	L ₁	d									
①代码	②D _{H7}	选择型	指定型 最小单位0.1																			
H选择型	3	+0.010	10 15 20	20	H+5	6	3	4	14	10	M3	10	3.6									
	4	0	10 15 20		10.0~20.0									H+6								
	5	+0.012	15 20 25		15.0~25.0									H+7								
	6	0	15 20 25											H+8								
	8	+0.015	15 20 25 30 40											H+9								
H指定型	10	0	20 25 30 40	25	H+10	8	4	6	18	13	M4	13	4.5									
	12	+0.018	20 25 30 40		H+11																	
	13	0	20 25 30 40		H+12																	
	16	0	20 25 30 40		H+13																	
	20	+0.021	25 30 40 50 60		25.0~60.0									H+18	10	5	8	26	18	M6	24	6.6
	25	0	30 40 50 60		30.0~60.0									H+20								
	30	0	35 40 50 60		35.0~60.0									H+23								
35	+0.025	40 50 60	40.0~80.0	H+25																		
40	0	40 50 60 80		H+30																		
50	0	50 60 80		H+38																		
			50.0~80.0	65		16	8		36	26		30	9									
								15	40	28	M8	40	14									

