



型号(1代码·2D) — (3)L
EAFW10 — 35

■ 请按步骤1~3选择型号和参数后进行订购。




型号区分: 7天发货


■ 台阶定位销
标准型·螺紋型



EAFW
EAFWC (不锈钢)



EAFWM (螺紋型)
EAFWCM (不锈钢螺紋型)

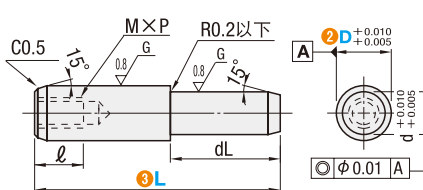

代码		材质	硬度
EAFW	EAFWM	SUU2	58HRC~
EAFWC	EAFWCM	SUS440C	

型号		3L	M×P	ℓ	d	dL
1 代码	2 D					
EAFW EAFWC (不锈钢)	5	15	—	—	4	5 10
	6	20	—	—	5	10 15
EAFWM (螺紋型)	8	25	3×0.5	6	6	10 15
	10	35	4×0.7	8	8	15 15
EAFWCM (不锈钢螺紋型)	13	40	5×0.8	10	10	20 25 30
		45				
		55				
		70	6×1.0			



型号(1代码·2D) — (3)L
EAIP6 — 10

■ 请按步骤1~3选择型号和参数后进行订购。




型号区分: 7天发货

■ 绝缘定位销



EAIP

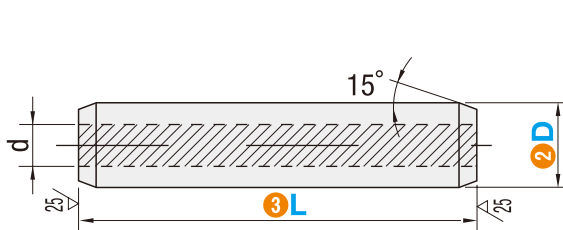

6.3/(25/√)

主体: 胶木
金属芯: SUS304

型号		D公差	d	3L
1 代码	2 D			
EAIP	6	+0.03 0	3	8 10 15 20 25 30 35 40
	8		4	10 15 20 25 30 35 40
	9		5	15 20 25 30 35 40 45 50
	10		6	15 20 25 30 35 40 45 50
	12			20 25 30 35 40 45 50



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达