



■ 请按步骤①~⑥选择型号和参数后进行订购。

① 型号 — ② D — ③ L — ④ P — ⑤ B — ⑥ E (仅锥形)
 (球面型) DACFSS — D1.50 — L10.0 — P0.90 — B1.5 —
 (锥头型) DACXSS — D1.50 — L10.0 — P1.20 — B2.0 — E0.5



型号区分: 7 天发货
 代码

定位销
 夹具衬套


20




材质	硬度	代码			
		平头型	球面型	锥头R型	锥型
高硬度不锈钢	35HRC~	DACFSS	DACPSS	DACTSS	DACXSS

前端形状选择


平头型CF




球面型CP



锥头R型CT




锥头型CX



■ R部尺寸

D	R
1.01~2.00	0.2
2.01~3.00	0.4

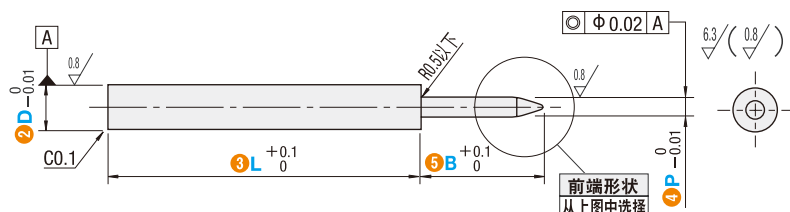



① 型号	② D 最小单位0.01mm	③ L 最小单位0.1mm	④ P 最小单位0.01mm	⑤ B 最小单位0.1 mm
平头型 DACFSS	0.51~1.00	3.0~20.0	0.50~0.99 (D > P)	1.5~5.0 (B - P/2 ≥ 1.0)
球面型 DACPSS	1.01~2.00	3.0~20.0	0.50~1.99 (D > P)	1.5~10.0 (B - P/2 ≥ 1.0)
	2.01~3.00	3.0~20.0	1.00~2.99 (D > P)	1.5~10.0 (B - P/2 ≥ 1.0)

① 型号	② D 最小单位0.01mm	③ L 最小单位0.1mm	④ P 最小单位0.01mm	⑤ B 最小单位0.1mm	⑥ E 最小单位0.5mm
锥头R型 DACTSS	1.01~2.00	3.0~20.0	0.50~1.99 (D > P)	2~10.0 (B - P/2 ≥ 1.0)	0.5~2.5
锥型 DACXSS	2.01~3.00	3.0~20.0	1.00~2.99 (D > P)	2~10.0 (B - P/2 ≥ 1.0)	0.5~2.5

① 锥头R型时, $B - 1.5 \geq 1.85P - 2.75R$ ② 锥型时, $B \geq E + 1.5$ $P \geq E$



① 型号 — ② D — ③ L — ④ P — ⑤ B — ⑥ E — (GDC · CC)
 DACFSS — D2.50 — L20.0 — P2.00 — B5.0 — CC (平头型)
 DACXSS — D2.50 — L20.0 — P2.00 — B5.0 — E1.5 — GDC (锥头型)

可选加工 代码	加工导入部 GDC	C 变更倒角 CC
技术说明	加工导入部。 指定方法 GDC  ① 适用于 $D \geq 2.01$、$L \geq 5.0$	将D尺寸部的倒角C0.1变更为C0.3。 指定方法 CC  ① 适用于 $D \geq 1.50$



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达