



# 定位销

## 直杆球面型 标准型/内螺纹型



型号 (1) 代码 · (2) D寸公差 · (3) D — (4) P  
DALSQAM6 — L14.0

■ 请按步骤 1~4 选择型号和参数后进行订购。



型号区分: 代码 7 天发货




代码		材质	表面处理	硬度
标准型	内螺纹型			
DALSQA	DALSQTA	SKS3	—	淬火硬度60~63HRC
DAGLSQA	DAGLSQTA	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACLSQA	DACLSQTA	SUS440C	—	淬火硬度50~55HRC
DASLSQA	DASLSQTA	SUS304	—	—
DAJKSL	DAJJSJL	SUS304	镀硬铬 厚度3~5μm	镀层硬度850HV~
DAJKJRL	DAJLJRL	SUJ2	镀硬铬 厚度3~5μm	淬火硬度56HRC~ 镀层硬度850HV~


### ■ 公差选择

D	D尺寸公差			
	M	P	G	H
	m6	p6	g6	h7
3	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010
4 · 5 · 6	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012
8 · 10	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015

### ■ 标准型

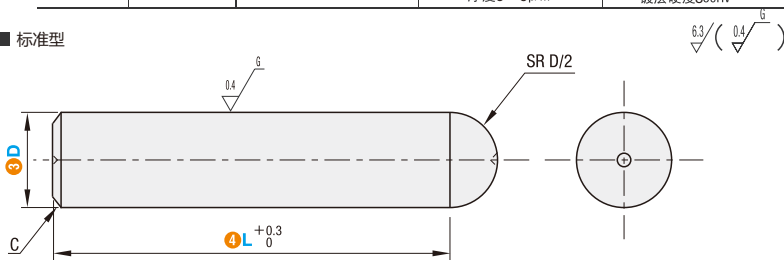

### ■ 内螺纹型

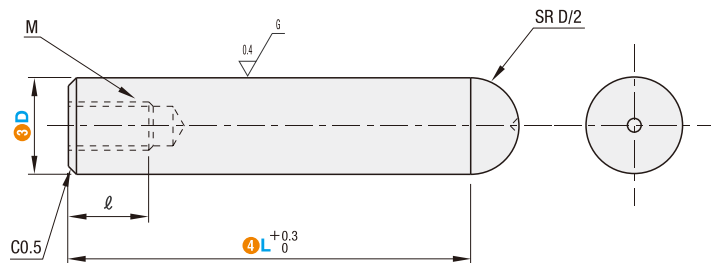

### ■ 内螺纹底孔深度

螺纹直径	M2	M3	M5
底孔直径d2	1.8	2.6	4.3
底孔深度U	8	9.5	14.5

### ■ 标准型

1 代码	型号			4 L 最小单位0.1mm	C
	2 D公差	3 D	3 D		
DALSQA DAGLSQA DACLSQA DASLSQA DAJKSL DAJKJRL	M P G H	1	3.0~10.0	0.1	
		2	3.0~20.0	0.5	
		3	3.0~20.0	0.5	
		4	3.0~25.0	1	
		5	4.0~30.0	1	
		6	5.0~40.0	1	
		8	5.0~40.0	1.5	
		10	5.0~40.0	2	

### ■ 内螺纹型

1 代码	型号			4 L 最小单位0.1mm	M (粗牙螺纹)	l
	2 D公差	3 D	3 D			
DALSQTA DAGLSQTA DACLSQTA DASLSQTA DAJJSJL DAJLJRL	M P G H	6	10.0~40.0	M3	5	
		8	15.0~40.0	M5	8	
		10	15.0~40.0	M5	8	

询价4种方式



官网 <http://www.srdfaa.com>  
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863  
客服热线 0755-27926613