



滚珠丝杠/支座组件

整合型传动座 方高型

新增

滚珠丝杠
组件



型号 ① 代码 · ② d — ③ F — ④ h
AIEG15 — 90 — 30

■ 请按步骤 ①~④ 选择
型号和参数后进行订购。



型号区分: ⑤ 天发货






代码	类型	材质	表面处理
		①③④⑥	①③④⑥
AIEG	整合型传动座 方高型	铸铁	发黑

构成零件


编号	零件名称	数量
①	传动座本体	1
②	轴承	1组
③	压板	1
④	间隔环	2
⑤	油封	2
⑥	锁紧螺母	1组

① 使用之轴承经预压处理, 轴向0间隙。

① 轴承采用P5配对DF组装, 最适宜滚珠丝杠使用。

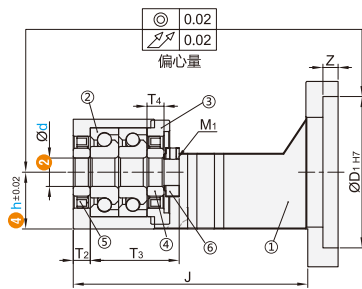

剖面B-B



剖面A-A

型号				适用 电机类型	ØD ₁	P.C.D	M	Z	B	P	L	J	E	E ₁	S	Q	H	H ₁	W ₁	T ₁	T ₂	T ₃	T ₄	M ₁	建议丝杠/支座			建议电机规格		
① 代码	② 适用丝杠规格	③ 适用电机法兰中心高	④ eF*																						⑤ oh	支撑侧	止口 规格	安装 P.C.D		
AIEG	15	90	30	伺服 电机	80	100	M6	8	100	75	140	125	70	50	11	17	58	45	56	22	47	9	M15×1.0	AIUN15 AIUNA15	80	100				
		100A			95	115	M6				141		71												95	115				
		100			110	130	M8				151		81												110	130				
		126			145	145	M8				153		83												110	145				
	130	80	100		M6	8					140		70							24		50	11	M17×1.0	—	80	100			
	90	95	115		M6						141		71													95	115			
	100A	110	130		M8						151		81													110	130			
	126	145	145		M8						153		83													110	145			
	17	90	30		80	100	M6	8			140		70							30		50	11	M20×1.0	AIUN20 AIUNA20	80	100			
		100A			95	115	M6				141		71													95	115			
		100			110	130	M8				151		81													110	130			
		126			145	145	M8				153		83													110	145			
	20	90	34		100	80	100	M6			8									140		70	30	50	11	M20×1.0	AIUN20 AIUNA20	80	100	
		100A				95	115	M6												141		71						95	115	
		100				110	130	M8												151		81						110	130	
		126				145	145	M8												153		83						110	145	
	15	86	30	步进 电机	73	98.4	M6	8			141		71				58	45	22	22	47	50	M15×1.0	AIUN15 AIUN20 AIFN20	73	98.4				
		100			73	98.4	M6				141		71				58	45	22						73	98.4				
		126			73	98.4	M6				141		71				58	45	22						73	98.4				
		130			73	98.4	M6				141		71				58	45	22						73	98.4				

① *带A为安川电机, 不带为其它品牌电机。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613