


■带肩止动螺丝固定型



D公差 (g6)	
3	-0.002 -0.008
4~6	-0.004 -0.012
8·10	-0.005 -0.014
12~16	-0.006 -0.017
20·25	-0.007 -0.020

代码	D公差	材质	硬度	表面处理	
BDHLSG	g6	S45C	-	发黑	
BDHLSGH			40~45HRC		
BDPHLSG			-	无电解镀锌	
BDPHLSGH			40~45HRC		
BDBLCL			40~45HRC	镀硬铬, 镀层厚度3~5μm	
BDSHLSG			镀层硬度850HV~		
BDSHLSGH			SUS304	-	-
BDBMSS			SUS440C	45~50HRC	
				48~53HRC	

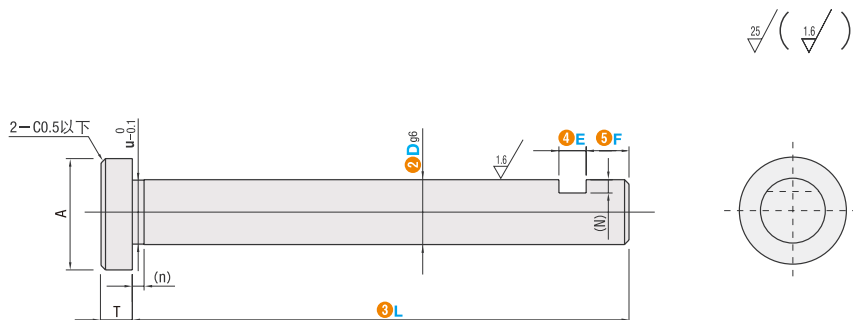

悬臂销·铰链销  
支点用台阶螺丝

12



型号(1代码·2D) - (3L) - (4E) - (5F)  
BDHLSG20 - 90.3 - E10 - F10

■请按步骤①~⑤选择型号和参数后进行订购。



型号区分: 7天发货

型号		③L 最小单位 0.1mm	最小单位 0.1mm		A	(d)	T	(N)	(n)
①代码	②D		④E	⑤F					
BDHLSG BDHLSGH BDPHLSG BDPHLSGH BDBLCL BDSHLSG BDSHLSGH BDBMSS	3	5.0~ 50.0	1 ≤ E ≤ 50	F = 0 或 2 ≤ F ≤ L/2	5.5	2.9	1.5	1.5	0.5
	4				6.5	3.9			
	5				8	4.9			
	6	10.0~ 100.0			9	5.8	2		1
	8				12	7.8			
	10	15.0~ 100.0			14	9.8	3		1
	12				17	11.8			
	15	20.0~ 150.0			20	14.8	4		2
	16				21	15.8			
	20				26	19.8			
25	30		24.8						

