





BASF6□□ZZ
BASF6□□AZZ
BASF6□□ZZ
BASMF1□□ZZ

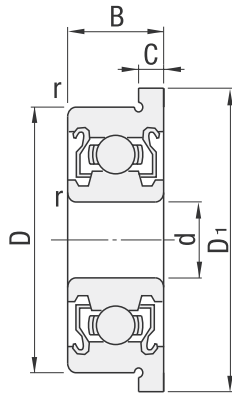

(安装图)

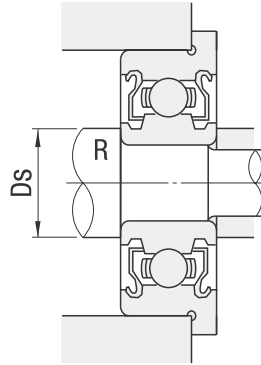

材 质 SUS440C
轴承精度 GB 307 P0
JIS B 1514 0级



型号

BASF6901ZZ



型号区分:

5 天发货

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)
							Cr (动) N	Cor (静) N		Ds (min.)	R (max.)	
BASF682ZZ	2	5	2.3	6.1	0.6	0.08	143	40	85000	2.7	0.08	0.22
BASF692ZZ		6	3.0	7.5	0.8	0.15	281	79	75000	3.0	0.15	0.48
BASF682AZZ	2.5	6	2.6	7.1	0.8	0.08	178	59	71000	3.7	0.08	0.36
BASF692AZZ		7	3.5	8.5	0.9	0.15	328	102	63000	3.85	0.15	0.68
BASF673ZZ	3	6	2.5	7.2	0.6	0.1	177	59	71000	3.6	0.08	0.33
BASF683ZZ		7	3	8.1	0.8		331	104	63000	3.9	0.1	0.53
BASF693ZZ		8	4	9.5	0.9	0.15	474	144	60000	4.2	0.15	0.97
BASF623ZZ		10	4	11.5		0.15	536	175	50000			1.86
BASF674ZZ	4	7	2.5	8.2	0.6	0.1	217	86	60000	4.6	0.08	0.35
BASF684ZZ		9		10.3	1		544	179	53000	5.0	0.1	1.14
BASF694ZZ		11	4	12.5		0.15	545	182	48000	5.2	0.15	1.96
BASF604ZZ		12		13.5	1	0.2	813	276		5.6	0.2	2.53
BASF624ZZ	5	13	5	15			1105	388	40000			3.53
BASF675ZZ		8	2.5	9.2	0.6	0.08	185	72	53000	6.2	0.08	0.41
BASF685ZZ		11	5	12.5		0.15	607	225	45000		0.15	2.18
BASF695ZZ		13	4	15		0.2	915	344	43000	6.6	0.2	2.84
BASF605ZZ	6	14		16	1		1105	404	40000			3.85
BASF625ZZ		16	5	18		0.3	1469	536	36000	7.7	0.3	5.3
BASF676ZZ		10	3	11.2	0.6	0.1	421	174	45000	6.6	0.1	0.77
BASF686ZZ		13		15	1.1	0.15	918	352	40000	7.0	0.15	3.04
BASF696ZZ	8	15	5	17		0.2	1139	418		7.6	0.2	4.26
BASF606ZZ		17		19	1.2	0.3	1921	668	38000	8	0.3	6.61
BASF626ZZ		19	6	22	1.5		1985	708	32000			9.09
BASF678ZZ		12	3.5	13.6	0.8	0.1	462	219	40000	8.8	0.1	1.15
BASF688ZZ	10	16	5	18	1.1	0.2	1368	568	36000	9.6	0.2	4.47
BASF698ZZ		19	6	22		0.3	1901	728		10	0.3	8.3
BASF608ZZ		22	7	25			2799	1103	34000			13
BASF670ZZ		15	4	16.5	0.8	0.15	684	348	15000	10.3	0.15	2.1
BASF680ZZ	12	19	5	21	1	0.3	1459	672	37000	12	0.3	6.1
BASF690ZZ		22	6	25	1.5		2156	1018	34000	13.2		11.1
BASF6701ZZ		18	4	19.5	0.8	0.2	787	424	13000	12.4	0.2	3.4
BASF6901ZZ		24	6	26.5	1.5	0.3	2453	1173	31000	14	0.3	13.2
BASF6702ZZ	15	21	4	22.5	0.8	0.2	796	466	11000	15.4	0.2	3.9
BASF6802ZZ		24	5	26	1.1	0.3	1762	1002	28000	17	0.3	8.3
BASF6902ZZ		28	7	30.5	1.5		3672	1807	26000			19.9

■标准尺寸

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)		
							Cr (动) N	Cor (静) N		Ds (min.)	R (max.)			
BASMF104ZZ	4	10	4	11.6	0.8	0.15	604	216	50000	5.9	0.2	1.5		
BASMF105ZZ	5						366	135		6		1.38		
BASMF126ZZ	6			12				608		234	43000	7.2	0.15	1.86
BASMF148ZZ	8			14				694		308	38000	9.26		2.42

