



拖链/抽屉滑轨



拖链

方便型·14系列



型号(① 代码 · ② C)

— ③ 弯曲半径

— ④ 链数

— ⑤ 接头

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分:

代码



7

天发货



拖链

代码	开口方向	颜色	允许温度	阻燃等级	附件
AHE14	外径开口	黑色	-40℃ ~ 80℃	UL94-V2	接头
AHZ14	内径开口				

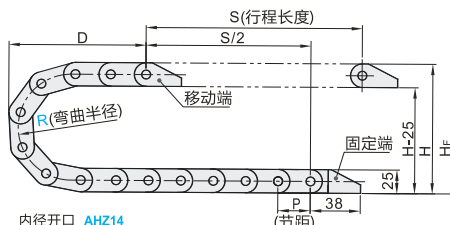


- H=理论安装高度
- Hf=实际安装高度
- D=拖链退回极限位置时的最小距离
- K=π · R+安全量

型号		弯曲 半径R	链节 数N	接头	H	D	K	所需安装 高度Hf	外宽 W	节距 P	最大电 缆直径	最大架空 负载 (kg/m)	最大架空 长度 (m)	重量		
代码	内宽C															
AHE14 AHZ14	15	28	1~	(带梳妆板) AHJ14A	82	71	150	92	27	30.5	13	0.5	0.65	≈0.31		
		38			102	81	185	112								
		48			122	91	215	132							37	≈0.32
		75			177	120	300	187								
		100			227	145	375	237								
		125			277	170	455	287								
	25	28			82	71	150	92	50					≈0.40		
		38			102	81	185	112								
		48			122	91	215	132								
		75			177	120	300	187								
		100			227	145	375	237								
		125			277	170	455	287								
	38	28		(无梳妆板) AHJ14B	82	71	150	92	62					≈0.44		
		38			102	81	185	112								
		48			122	91	215	132								
		75			177	120	300	187								
		100			227	145	375	237								
		125			277	170	455	287								
	50	28			82	71	150	92								
		38			102	81	185	112								
		48			122	91	215	132								
		75			177	120	300	187								
		100			227	145	375	237								
		125			277	170	455	287								



接头

代码	梳妆板	材质	颜色	允许温度	阻燃等级
AHJ14A	有	工程塑料	黑色	-40℃ ~ 120℃	UL94-HB
AHJ14B	无				

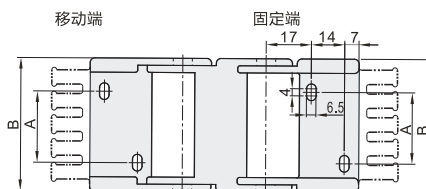

型号	拖链内宽C	齿数	A	B
AHJ14A	15	2	—	26.3
	25	3	10	36.3
AHJ14B	38	4	23	49.3
	50	5	35	62.3

