



型号(1代码·2D) - (3d) - (4L) - (5X) - (6Y) - (7Z)
CDFGV30 - 8 - L80 - X10 - Y6 - Z5

■ 请按步骤 ①~⑦ 选择型号和参数后进行订购。




型号区分: 5 天发货
代码




代码	类型	材质		表面处理
		国标	相当	
CDFGV	带肋槽直柱型	无法兰型	LF2 A5052	本色阳极氧化

■ 圆孔+螺孔型



6.3


■ 肋槽部




■ 键槽尺寸 N: 新JIS(B1301)键槽尺寸表

N _{H7}	b _{JS9}		t公差
	3	4	
8	±0.015	3	1.4
10			
K10	±0.018	4	1.8
12			
15	±0.021	5	2.3
20			
25	0	6	2.8
30			
30	±0.0180	8	3.3
30			

■ 键槽孔+螺孔型

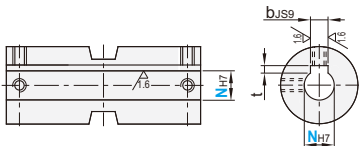

■ 平皮带导条形状与滑轮肋槽避让尺寸参考图



① 其它规格尺寸请参考F4平皮带资料。

■ 圆孔+螺孔型

型号		最小单位1	5 X	6 Y	7 Z	M	V	
1 代码	2 D							3 d _{H7}
CDFGV	30	8	40~100	10.0~16.0	5.0~15.0	6.0~8.0	M4 4	
		10						
		12						
	35	10						
		12						
		15						
	40	10						
		12						
		15						
	50	15						M5 4.5
		20						
		25						
60	20	M6 5						
	25							
	30							
80	25		M8 6.5					
	30							
	35							

■ 键槽孔+螺孔型

型号		最小单位1	5 X	6 Y	7 Z	M	V
1 代码	2 D						
CDFGV	30	8	10.0~16.0	5.0~15.0	6.0~8.0	M3 4	
		10/K10					
		12					
		10/K10					
		12					
		15					
	35	12				D ≤ 50时 40~100	
		15					
		20					
	40	12					D = 60/80时 60~100
		15					
		20					
50	15	M5 4.5					
	20						
	25						
60	20		M5 5				
	25						
	30						
80	25			M6 6.5			
	30						
	30						



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达