



导向轴

一端锥形一端台阶内螺纹型

新增



■ 请按步骤①~⑦选择型号和参数后进行订购。

型号(①代码·②D) - ③L - ④E - ⑤P - ⑥H - ⑦M
AAHZJR8 - 30 - E6 - P6 - H8 - M3



型号区分:

代码


5

天发货



一端锥形一端台阶内螺纹型

AAHZJR
AAHXJRL
AAHVSSR
AAHSSRL

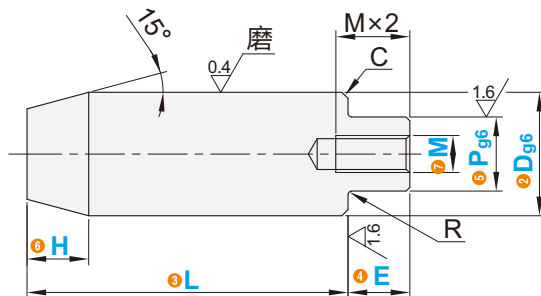

一端锥形一端台阶内螺纹型

型号		最小单位1					M 选择				R	C
①代码	②Dg6	③L	④E	⑤P	⑥H	⑦选择						
AAHZJR AAHXJRL AAHVSSR AAHSSRL	8	20~200	2 ≤ E ≤ P × 4	6	5~10	3				0.3	0.5	
	10	25~200		6~8	5~12	3 4 5						
	12	35~300		6~10	5~16	3 4 5 6						
	13	45~300		6~11	5~18	3 4 5 6 8						
	15	45~300		6~13	10~22	3 4 5 6 8 10						
	16	45~500		6~14	10~24	3 4 5 6 8 10						
	18	55~500		6~16	10~28	4 5 6 8 10 12						
	20	55~500		6~17	10~30	4 5 6 8 10 12						



型号(①代码·②D) - ③L - ④E - ⑤P - ⑥H - ⑦M - (LKC...etc.)
AAHZJR8 - 30 - E6 - P7 - H8 - M3 - LKC

代码	技术说明		代码	技术说明																						
LKC	变更L尺寸公差 	选型方法 LKC ① 最小单位0.1 ① L < 300 变更为 L _{±0.03} ; 300 ≤ L < 600 变更为 L _{±0.05} ; L ≥ 600 变更为 L _{±0.1} ① 只适用AAHZJR。	SC()	增加1个扳手槽 M侧 	选型方法 SC5 ① 最小单位1 <table border="1"> <thead> <tr> <th>D</th> <th>W</th> <th>ℓ1</th> </tr> </thead> <tbody> <tr><td>6</td><td>5</td><td rowspan="3">9</td></tr> <tr><td>8</td><td>7</td></tr> <tr><td>10</td><td>8</td></tr> <tr><td>12</td><td>10</td><td rowspan="5">11</td></tr> <tr><td>13</td><td>11</td></tr> <tr><td>15</td><td>13</td></tr> <tr><td>18</td><td>16</td></tr> <tr><td>20</td><td>17</td></tr> </tbody> </table>	D	W	ℓ1	6	5	9	8	7	10	8	12	10	11	13	11	15	13	18	16	20	17
D	W	ℓ1																								
6	5	9																								
8	7																									
10	8																									
12	10	11																								
13	11																									
15	13																									
18	16																									
20	17																									

① 可选加工可能会使产品硬度降低。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613