



型号(①代码·②D) — ③P — ④L — ⑤B — ⑥E  
 DASFPG6 — P5.00 — L10 — B10.0 — E2.0  
 DAFPN3 — P2.01 — L6 — B6.0 — E2.0

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ⑦天发货

### ■ 内螺纹型




### ■ D尺寸公差


D	D公差
	g6
6	-0.004 -0.012
8	-0.005 -0.014
10	-0.005 -0.014

代码		材质	表面处理	硬度
圆型	三角型			
DASFPG	DALHKR	SKS3	-	淬火硬度60~63HRC
DAGFPG	DALHKRL		镀硬铬 厚度3~5μm	
DASFPG	DALHS	SUS304	-	-
DALHSL	DALJSL		镀硬铬 厚度5~8μm	镀层硬度850HV~
DALHSSR	DALJSSR	SUS440C	-	淬火硬度50~55HRC

### ■ 圆型

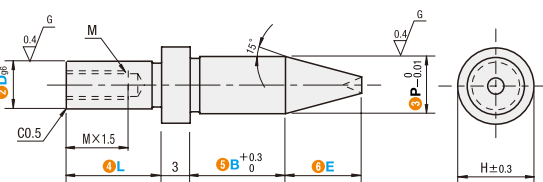

### ■ 三角型

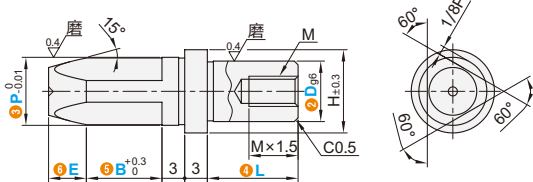

型号		③P	④L	⑤B	⑥E	H	M
①代码	②D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm		
DASFPG	DALHKR	4.00~7.00	6~12	2.0~12.0	0.5~10.0	8	M3
DAGFPG	DALHKRL	5.00~9.00	8~16	2.0~15.0	0.5~10.0	11	M4
DASFPG	DALHS	6.00~11.00	10~20	3.0~20.0	0.5~10.0	13	M5
DALHSL	DALJSL						
DALHSSR	DALJSSR						

### ■ 外螺纹型




### ■ D尺寸公差


D	D公差
	g6
3	-0.002 -0.008
4	-0.004 -0.012
5	-0.005 -0.014
6	-0.005 -0.014
8	-0.005 -0.014
10	-0.005 -0.014

代码		材质	表面处理	硬度
圆型	三角型			
DAFPN	-	SKS3	-	淬火硬度60~63HRC
DAGFPN	-		镀硬铬 厚度3~5μm	
-	DALZWR	SKD11	-	-
-	DALZWRL		镀硬铬 厚度3~5μm	
DASFPN	DAYZS	SUS304	-	-
DALZSL	DALXSL		镀硬铬 厚度5~8μm	
DACFPN	DALXSSR	SUS440C	-	淬火硬度50~55HRC

### ■ 圆型

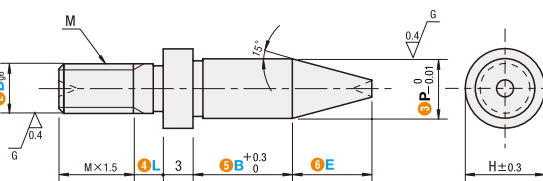

### ■ 三角型

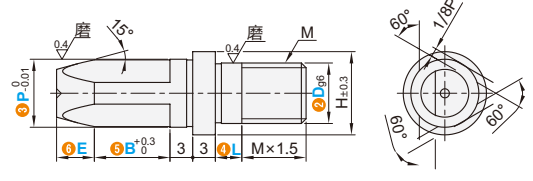

型号		③P	④L	⑤B	⑥E	H	M
①代码	②D	最小单位0.01mm	最小单位1mm	最小单位0.1mm	最小单位0.1mm		
DAFPN	DALZWR	2.00~5.00	0~12	2.0~10.0	0.5~10.0	6	M3
DAGFPN	DALZWRL	2.00~5.00	0~12	2.0~10.0	0.5~10.0	6	M4
DASFPN	DAYZS	3.00~7.00	0~12	2.0~10.0	0.5~10.0	8	M5
DALZSL	DALXSL	4.00~7.00	0~12	2.0~12.0	0.5~10.0	8	M6
DACFPN	DALXSSR	5.00~9.00	0~12	2.0~15.0	0.5~10.0	11	M8
		6.00~11.00	0~12	2.0~20.0	0.5~10.0	13	M10



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

**SRO** 仕瑞达