



定位导向零件

带垫片·带垫板止动圈/止动块 聚氨酯型·橡胶型



型号(1代码·2No.) — 3 T
DBUWH4 — 8

■请按步骤①~③选择型号和参数后进行订购。





型号区分: 7 天发货
代码

■ 聚氨酯型 带垫片聚氨酯止动圈



代码	聚氨酯		垫圈
	材质	硬度	材质
DBUWH	乙醚类聚氨酯(黑色)	肖氏A90	SUS304



型号		3 T	D	d1	d2	V
1 代码	2 No.					
DBUWH	3	7	15	14	6	3
		10				
		8				
	4	15	20	19	8	4
		9				
	5	20	25	24	9.5	5
		10				
	6	25	30	29	11	6
		12				
	8	30	40	39	14	8
		14				
	10	35	50	49	17	10



型号(1代码·2No.) — 3 T — 4 L
DBTWH6 — 10
DBTUPL12 — 6 — 30

■请按步骤①~④选择型号和参数后进行订购。





型号区分: 7 天发货
代码

■ 橡胶型 带垫片橡胶挡圈



代码	橡胶		垫圈
	材质	硬度	材质
DBTUWH	橡胶	肖氏A57	SUS304




型号		3 T	D	d1	d2	V	冲击吸收量 (kgf·cm)	耐负载 (kgf)
1 代码	2 No.							
DBTUWH	3	7	15	14	6	3	0.112	4.2
		10					0.161	3.6
		8					0.261	8.0
	4	15	20	19	8	4	0.474	6.8
		9					0.523	14.0
	6	10	30	29	11	6	0.919	21.4
		25					2.018	16.4
	8	12	40	39	14	8	2.221	41.6
		12						

■ 橡胶型 带垫板橡胶挡块



代码	橡胶		板
	材质	硬度	材质
DBTUPL	橡胶	肖氏A57	SUS304

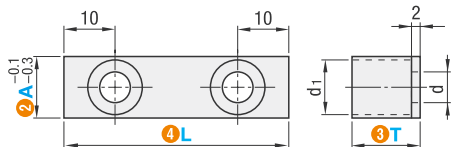

型号		3 T 选择	4 L 选择	d	d1	冲击吸收量 (kgf·cm)	耐负载 (kgf)
1 代码	2 A						
DBTUPL	12	6	30	3.5	6.5	0.217	6.6
			50			0.577	17.6
		10	30			0.324	6.0
			50			0.786	14.6
	15	10	30	3.5	4.5	0.408	7.4
			50			1.024	19.0
		19	50			1.234	23.0
			75			2.51	47.0

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613