



■ 请按步骤①~⑧选择型号和参数后进行订购。

型号(①代码·②D) — ③d — ④L — ⑤H — ⑥X — ⑦Y — ⑧Z

圆弧型 CDBAWC30 — 10 — L350 — H1.0
 带肋槽直柱型 CDBSWM50 — 20 — L350 — X14.0 — Y11.8 — Z5.0




型号区分:

代码

7 天发货

■ 键槽形状




■ 新JIS (B1301) 键槽尺寸表


公称型号	dH9	bJS9	t公差
N8	8	3	1.4
N10	10	±0.0125	1.8
NK10	10	±0.0150	2.3
N12	12	±0.0180	2.8
N15	15	±0.0200	3.3
N20	20	±0.0250	4.0
N25	25	±0.0300	4.8
N30	30	±0.0350	5.6
N35	35	±0.0400	6.4

代码		材质	表面处理
圆弧型	带肋槽直柱型		
CDBAWC	CDBAWM	铝合金	本色阳极氧化处理
CDBMWC	CDBMWM	STKM13A	无电解镀锌
CDBSWC	CDBSWM	SUS304	—

圆弧型

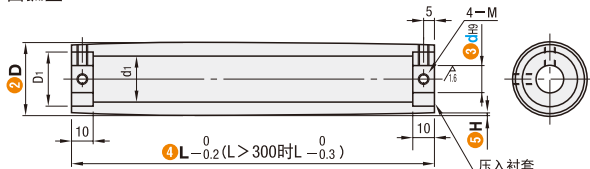

带肋槽直柱型

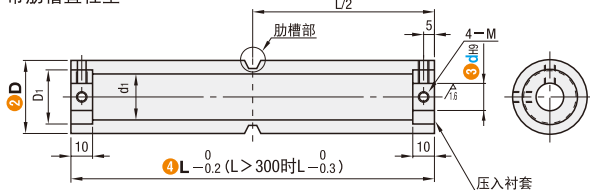

肋槽部



型号		③dH9		最小单位 1mm	⑤H选择 (圆弧型时指定)		最小单位 0.1mm (带肋槽直柱型时指定)			K	d1			D1	M (粗牙螺纹)											
① 代码	②D	圆孔+ 螺纹孔	键槽孔+ 螺纹孔	④L	L=110~300	L=310~500	⑥X	⑦Y	⑧Z	键 长度	铝合 金	STKM13A	SUS304		圆孔+ 螺纹孔	键槽孔+ 螺纹孔										
CDBAWC	30	8	N8	110~510	0.3	0.5	7.0~15.0	5.0~12.0	2.0~4.5	25	15	15.8	18	22	M4	M3										
CDBMWC		10	N10 · NK10							30																
CDBSWC		12	N12							25																
CDBAWM	35	10	N10						4.0~6.0	25	17	18.1	18	27	M4	M3										
		12	N12							30																
		15	N15																							
CDBAWC	40	12	N12						0.3	0.5	7.0~15.0	5.0~12.0	4.0~7.0	30	17	18.7	20	33	M4	M3						
CDBMWC		15	N15																	M4						
CDBSWC		20	N20												22	22.7	22			M5						
CDBAWM	50	15	N15										4.0~6.0		17	30	28	40	M5	M4						
CDBMWM		20	N20												22					M5						
CDBSWM		25	N25												27					M6						
CDBAWC	60	20	N20										1.2					4.0~7.0	30	22	—	—	45	M6	M5	
		25	N25																						M6	
		30	N30																							
CDBAWM	80	25	N25															4.0~7.0		41	—	—	55	M8	M6	
		30	N30																							M8
		35	N35																							

① 选购键槽孔+螺纹孔的轴孔直径10、键槽宽4.0mm(高1.8mm)的规格时, 请指定NK10。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达

平
滑
皮
带
·
圆
皮
带
·
惰
轮
皮
带