




型号

BAM698ZZ

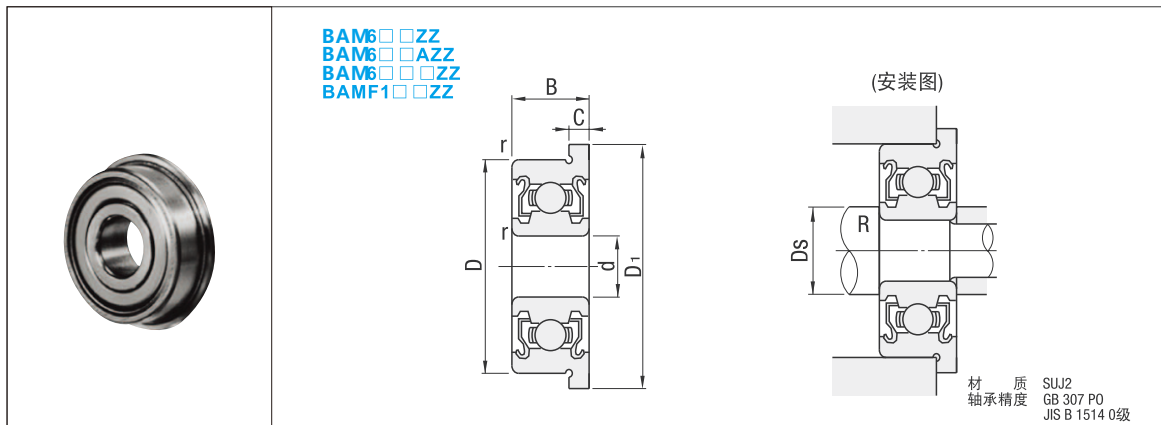

型号区分:

5

天发货

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)
							Cr (动) N	Cor (静) N		Ds (min.)	R (max.)	
BAM682ZZ	2	5	2.3	6.1	0.6	0.08	169	50	85000	2.7	0.08	0.22
BAM692ZZ	2.5	6	3.0	7.5	0.8	0.15	330	98	75000	3.0	0.15	0.48
BAM682ZZ	2.5	6	2.6	7.1	0.8	0.15	208	74	71000	3.7	0.08	0.36
BAM673ZZ	3	6	2.5	7.2	0.6	0.1	208	74	71000	3.6	0.08	0.33
BAM683ZZ	3	7	3	8.1	0.8	0.1	390	130	63000	3.9	0.1	0.53
BAM693ZZ	3	8	4	9.5	0.9	0.15	560	179	60000	4.2	0.15	0.97
BAM603ZZ	3	9	5	10.5	1	0.15	570	187	56000	4.2	0.15	1.63
BAM623ZZ	3	10	4	11.5	1	0.15	630	218	50000	4.2	0.15	1.86
BAM674ZZ	4	7	2.5	8.2	0.6	0.1	222	88	60000	4.6	0.08	0.35
BAM684ZZ	4	9	3	10.3	1	0.1	640	224	53000	5.0	0.1	1.14
BAM694ZZ	4	11	4	12.5	1	0.15	715	276	48000	5.2	0.15	1.96
BAM604ZZ	4	12	5	13.5	1	0.2	957	345	48000	5.2	0.15	2.53
BAM624ZZ	4	13	5	15	1	0.2	1300	485	40000	5.6	0.2	3.53
BAM675ZZ	5	8	2.5	9.2	0.6	0.1	217	91	53000	5.6	0.2	0.41
BAM685ZZ	5	11	5	12.5	1	0.15	715	281	45000	6.2	0.15	2.18
BAM695ZZ	5	13	4	15	1	0.2	1080	430	43000	6.6	0.2	2.84
BAM605ZZ	5	14	5	16	1	0.2	1330	505	40000	6.6	0.2	3.85
BAM625ZZ	5	16	5	18	1	0.3	1729	670	36000	7.7	0.3	5.3
BAM676ZZ	6	10	3	11.2	0.6	0.1	465	196	45000	6.6	0.1	0.77
BAM686ZZ	6	13	5	15	1.1	0.15	1080	440	40000	7.0	0.15	3.04
BAM696ZZ	6	15	5	17	1.2	0.2	1350	530	40000	7.6	0.2	4.26
BAM606ZZ	6	17	6	19	1.5	0.3	2190	835	38000	8	0.3	6.61
BAM626ZZ	6	19	6	22	1.5	0.3	2336	885	32000	8	0.3	9.09
BAM678ZZ	8	12	3.5	13.6	0.8	0.1	515	252	40000	8.8	0.1	1.15
BAM688ZZ	8	16	5	18	1.1	0.2	1610	710	36000	9.6	0.2	4.47
BAM698ZZ	8	19	6	22	1.5	0.3	1990	865	34000	10	0.3	8.3
BAM608ZZ	8	22	7	25	1.5	0.3	3350	1400	34000	10	0.3	13
BAM670ZZ	10	15	4	16.5	0.8	0.15	855	435	15000	10.3	0.15	2.1
BAM680ZZ	10	19	5	21	1	0.3	1716	840	37000	12	0.3	6.1
BAM690ZZ	10	22	6	25	1.5	0.3	2695	1273	34000	13.2	0.3	11.1
BAM6701ZZ	12	18	4	19.5	0.8	0.2	926	530	13000	12.4	0.2	3.4
BAM6801ZZ	12	21	5	23	1.1	0.3	1915	1041	33000	14	0.3	7.1
BAM6901ZZ	12	24	6	26.5	1.5	0.3	2886	1466	31000	14	0.3	13.2
BAM6702ZZ	15	21	4	22.5	0.8	0.2	937	582	11000	15.4	0.2	3.9
BAM6802ZZ	15	24	5	26	1.1	0.3	2073	1253	28000	17	0.3	8.3
BAM6902ZZ	15	28	7	30.5	1.5	0.3	4321	2259	26000	17	0.3	19.9
BAM6703ZZ	17	23	4	24.5	0.8	0.2	1000	658	9500	17.4	0.2	4.4
BAM6803ZZ	17	26	5	28	1.1	0.3	2233	1456	26000	19	0.3	8.9
BAM6903ZZ	17	30	7	32.5	1.5	0.3	4588	2565	23000	19	0.3	21.4
BAM6704ZZ	20	27	4	28.5	0.8	0.2	1041	729	8500	20.4	0.2	6.3
BAM6804ZZ	20	32	7	35	1.5	0.3	4015	2462	21000	22	0.3	19.8
BAM6904ZZ	20	37	9	40	2	0.3	6381	3682	19000	22	0.3	42.8
BAM6805ZZ	25	37	7	40	1.5	0.3	4303	2932	18000	27	0.3	26.1
BAM6905ZZ	25	42	9	45	2	0.3	7001	4540	16000	27	0.3	50.2

■标准尺寸

型号	d	D	B	D ₁	C	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)
							Cr (动) N	Cor (静) N		Ds (min.)	R (max.)	
BAMF104ZZ	4	10	4	11.6	0.8	0.15	710	270	48000	5.9	0.15	1.5
BAMF105ZZ	5	12	4	13.6	0.8	0.15	430	168	50000	6	0.15	1.38
BAMF126ZZ	6	12	4	13.6	0.8	0.15	715	292	43000	7.2	0.15	1.86
BAMF148ZZ	8	14	4	15.6	0.8	0.15	817	385	38000	9.26	0.15	2.42



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达