



型号 (1) 代码 · (2) D — (3) Y — (4) F — (5) N
 BDFBA10 — 25 — F18
 BDFNAA10 — 25 — F18 — N12

■ 请按步骤 1~5 选择 型号和参数后进行订购。




型号区分: 代码 **7** 天发货


■ 标准型




代码		材质	表面处理
螺纹长度固定型	螺纹长度指定型	S45C	发黑
BDFAA	BDFNAA		无电解镀锌
BDPFAA	BDPFNAA	SUS304	—
BDSFAA	BDSFNAA	SCM435	发黑
BDHFAA	—	硬度35~40HRC	—



螺纹长度固定型

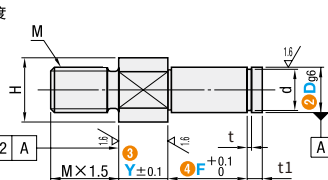

螺纹长度指定型

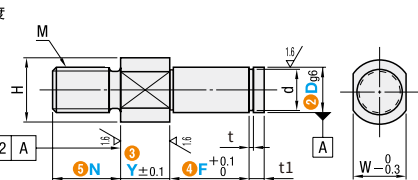


型号		1mm			H	W	M	d		t	t1	
1 代码	2 Dg6	3 Y	4 F	5 N			(粗牙螺纹)	基准尺寸	公差			
螺纹长度固定型 BDFAA BDPFAA BDSFAA BDHFAA	3	-0.002 -0.008	2~30	3~50	3~6	7	5	M3	2	+0.060 0	0.5	2
	4	-0.004 -0.012			4~8	8	6	M4	3	+0.075 0	0.7	
	5				5~10	9	7	M5	4			
	6				6~12	10	8	M6	5			
螺纹长度指定型 BDFNAA BDPFNAA BDSFNAA	8	-0.005 -0.014	2~60	5~100	8~16	12	10	M8	7	+0.090 0 -0.090	0.9	3
	10	-0.006 -0.017			10~20	15	13	M10	9.6	0 -0.110	1.15	
	12				10~100	17	14	M12	11.5			
	15				12~24	20	17		14.3			

■ 台型型



代码	材质	表面处理
BDFBA	S45C	发黑
BDPFBA		无电解镀锌
BDSFBA	SUS304	—
BDPHFBA	SCM435 硬度35~40HRC	发黑

6.3 / (1.6 /)

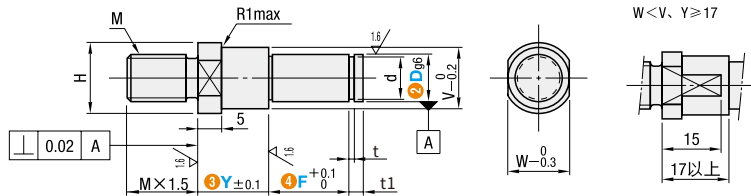

代码		最小单位 1mm			V	H	W	M	d		t	t1
1 型号	2 Dg6	3 Y	4 F	5 N			(粗牙螺纹)	基准尺寸	公差			
BDFBA BDPFBA BDSFBA BDPHFBA	3	-0.002 -0.008	7~30	3~50	5	7	5	M3	2	+0.060 0	0.5	2
	4	-0.004 -0.012			6	8	6	M4	3	+0.075 0	0.7	
	5				7	9	7	M5	4			
	6				8	10	8	M6	5			
	8	-0.005 -0.014	7~60	5~100	10	12	10	M8	7	+0.090 0 -0.090	0.9	3
	10	-0.006 -0.017			13	15	13	M10	9.6	0 -0.110	1.15	
	12				15	17	14	M12	11.5			
	15				10~100	18	20		17			14.3

