



型号(1)代码·(2)D - (3)L - (4)Y - (5)F
ADYZ5 - 72 - 20 - 15


■ 请按步骤①~⑤选择
型号和参数后进行订购。



型号区分:
代码 7 天发货



衬套	型号			材质		硬度	
	直柱型	一端内螺纹管型	两端内螺纹型	导向轴衬套	滚珠保持器	滚珠	滚珠
直柱型	ADYZ	ADYA	ADYY	SUJ2	黄铜	SUJ2	58HRC~
	ADSYZ	ADSYA	ADSBY	SUS440C		SUS440C	56HRC~
肩型	ADYHZ	ADYHA	ADYHY	SUJ2		SUJ2	58HRC~
	ADSYHZ	ADSYHA	ADSYHY	SUS440C		SUS440C	56HRC~

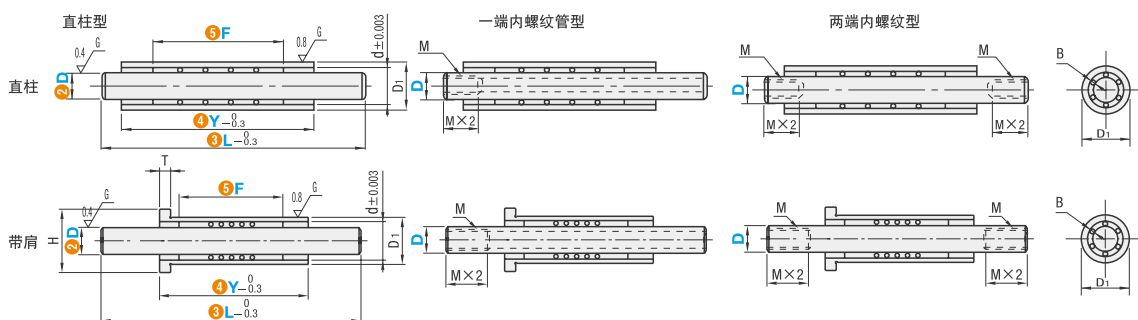

型号		(3)L		(4)Y	(5)F	D ₁ 外径公差	T	H	d	M (mm)	B
① 代码	② D	直柱型 一端内螺纹管型 指定长度最小1mm	两端内螺纹 选择	选择	选择						
直柱型	(2)	30~50	—	10 15 20	10 15 20	5	2.5	7	3.2	—	0.6
一端内螺纹管型	(3)	40~70		10 20 30	10 15 20	6	0	8	4.2	—	
ADYZ	(4)	40~90	40 50 60 70 80 90	10 20 30	15 20 30	7	0	9	5.2	—	
ADYA	(5)	40~150		20 30 40	20 30 40	8	0	10	6.2	M3	
ADSYZ	(6)					9	0	11	7.2	M3	1.0
ADSYA	(7)					10	0	12	8.2	M4	
ADSBY	(8)					11	0	13	9.2	M4	
ADYHZ	(9)					12	0	14	10.2	M5	
ADYHA	(10)		40 50 60 70 80 90 100			13	0	15	11.2	M5	1.0
ADYHY	(11)					14	0	16	12.2	M6	
ADSYHZ	(12)					15	0	17	13.2	M6	

① 带有()符号的尺寸仅适用于ADYZ·ADSYZ·ADYHZ·ADSYHZ。

② 行程请按照(Y-F)×2计算。衬套或导向轴的行程为滚珠滑动距离(Y-F)的2倍。

基本额定负载表

② D	F	基本额定负载 Co (静) N	② D	F	基本额定负载 Co (静) N
2	10	15.0	6	15	43.2
	15	24.4		20	59.8
	20	33.7		30	83.1
3	10	16.3	8	15	59.0
	15	26.5		20	81.6
	20	36.7		30	113.4
4	10	21.1	10	20	147.7
	15	34.3		30	221.5
	20	47.5		40	307.7
5	10	26.1	12	20	187.4
	15	42.4		30	281.1
	20	58.7		40	390.5



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达