



型号(1)代码·(2)D — (3)L
 DALT6 — 20
 DALN6 — 15

■ 请按步骤1~3选择型号和参数后进行订购。




型号区分: 代码 7 天发货

■ 内螺纹型



D尺寸公差	
D尺寸	g6
5	-0.004 -0.012
6	-0.005 -0.014
8	-0.005 -0.014
10	-0.006 -0.017
12	-0.006 -0.017

代码	材质	表面处理	硬度
DALT	GCr15(SUJ2)	—	淬火硬度45~50HRC
DABRJRL	GCr15(SUJ2)	镀硬铬 厚度3~5μm	淬火硬度45~50HRC
DACLT	9Cr18(SUS440C)	—	淬火硬度50~55HRC
DASLT	SUS304	—	—

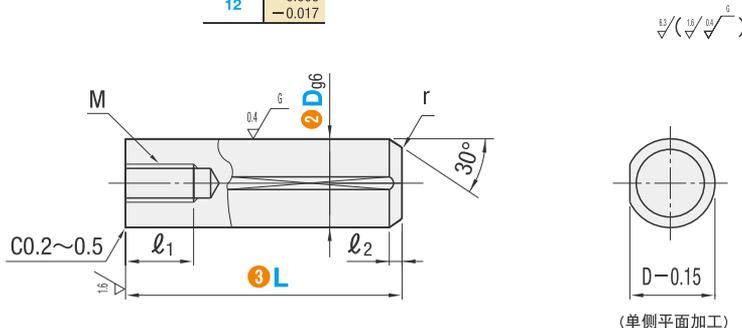


型号		3 L选择			M (粗牙螺纹)	l1	l2	r
1 代码	2 D	DALT	DACLT	DASLT				
DALT DABRJRL DACLT DASLT	5	10 12 15 20 25 30	10 12 15 20 25 30	10 12 15 20 25 30	M3	6	1	1
	6	10 12 15 20 25 30	10 12 15 20 25 30	10 12 15 20 25 30	M4	8	1	1
	8	12 15 20 25 30	12 15 20 25 30	12 15 20 25 30	M5	8	1.5	1.5
	10	20 25 30	20 25 30	20 25 30	M6	10	1.5	1.5
	12	20 25 30	20 25 30	20 25 30	M6	10	2	2

■ 外螺纹型



D · d公差			
D · d	g6	D · d	g6
3	-0.002 -0.008	8	-0.005 -0.014
4	-0.004 -0.012	10	-0.006 -0.017
5	-0.004 -0.012	12	-0.006 -0.017
6	-0.004 -0.012	12	-0.006 -0.017

代码	材质	表面处理	硬度
DALN	GCr15(SUJ2)	—	淬火硬度45~50HRC
DABTJRL	GCr15(SUJ2)	镀硬铬 厚度3~5μm	淬火硬度45~50HRC
DACLN	9Cr18(SUS440C)	—	淬火硬度50~55HRC
DASLN	SUS304	—	—

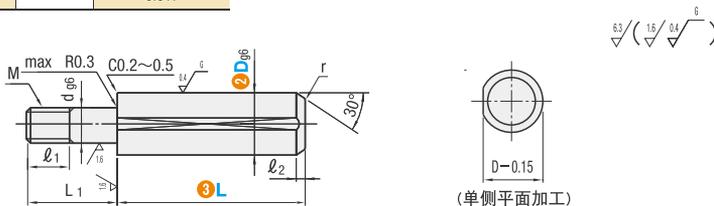

型号		3 L选择			M (粗牙螺纹)	dg6	L1	l1	l2	r
1 代码	2 D	DALT	DACLN	DASLN						
DALN DABTJRL DACLN DASLN	5	10 12 15 20 25 30	10 12 15 20 25 30	10 12 15 20 25 30	M3	3	12	7	1	1
	6	10 12 15 20 25 30	10 12 15 20 25 30	10 12 15 20 25 30	M4	4	15	10	1	1
	8	10 12 15 20 25 30	10 12 15 20 25 30	10 12 15 20 25 30	M5	5	15	10	1.5	1.5
	10	15 20 25 30	15 20 25 30	15 20 25 30	M6	6	20	15	1.5	1.5
	12	15 20 25 30	15 20 25 30	15 20 25 30	M6	6	20	15	2	2



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达