



■ 请按步骤 ①~⑥ 选择型号和参数后进行订购。

型号(①代码·②D)_{g6} - ③L - ④F - ⑤P - ⑥M
AAHTJR10 - 50 - F8 - P6 - M3




型号区分:


代码

5 天发货

■ 内螺纹型




代码	类型	D公差	材质	硬度	表面处理
AAHMJR	内六角孔型 内螺纹型	g6	SUJ2	高频淬火	—
AAHKJRL				有效硬化层深度见P15	
AAHWSSR			淬火硬度		
AAHRSSRL			GCr15 9Cr18Mo	HRC56- HRC54-	
					镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm
					—
					镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm

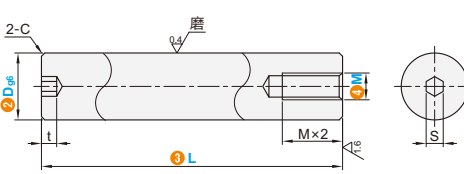


①代码	型号	②D _{g6}	③L	④ M 选择	C	S	内六角孔深度 t	
AAHMJR AAHKJRL AAHWSSR AAHRSSRL	6	-0.004 -0.012	15-300	3	0.5	2.5	3.5	
	8	-0.005 -0.014	15-400	3 4 5			3	4.5
	10		15-500	3 4 5 6			4	6
	12		15-600	4 5 6 8			5	7.5
	13		20-650	4 5 6 8				
	15	-0.006 -0.017	20-750	4 5 6 8 10				
	16		25-800	4 5 6 8 10				
	18		25-900	4 5 6 8 10 12				
	20	-0.007 -0.020	25-1000	4 5 6 8 10 12		6		
						1.0	8	12

■ 台阶内螺纹型



代码	类型	D公差	材质		硬度	表面处理
			国标	相当		
AAHTJR	内六角孔型 台阶内螺纹型	g6	GCr15	SUJ2	高频淬火	—
AAHYJRL					有效硬化层深度见P15	
AAHUSSR			淬火硬度			
AAHPSSRL			GCr15 9Cr18Mo	SUS440C 9Cr18Mo	HRC56- HRC54-	
						镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm
						—
						镀硬铬, 镀层硬度HV850-, 镀层厚度3-5μm

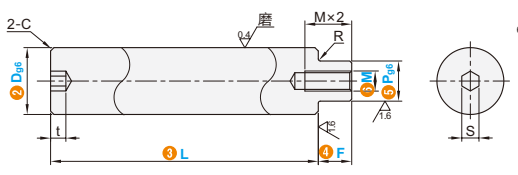


①代码	型号	②D _{g6}	③L		④ F	⑤ P	⑥ M 选择	R	C	S	内六角孔深度 t		
AAHTJR AAHYJRL AAHUSSR AAHPSSRL	8	-0.005 -0.014	20-400	2≤F≤P×4	F	P	6	0.3	0.5	3	4.5		
	10		20-500				6-8				3 4 5	3	6
	12		20-600				6-10				3 4 5 6	5	7.5
	13		20-650				6-11				3 4 5 6 8		
	15	-0.006 -0.017	20-750				6-13			3 4 5 6 8 10			
	16		20-800				6-14			3 4 5 6 8 10			
	18		20-900				6-16			4 5 6 8 10 12			
	20	-0.007 -0.020	20-1000				6-17			4 5 6 8 10 12	6		
											1.0	8	12



型号(①代码·②D) - ③L - ④F - ⑤P - ⑥M - (LKC...etc.)
AAHTJR10 - 50 - F8 - P6 - M3 - LKC

代码: LKC


技术说明: 变更L尺寸公差



选型方法 LKC
① 最小单位0.1
② L < 300 变更为 L±0.03;
300 ≤ L < 600 变更为 L±0.05;
L ≥ 600 变更为 L±0.1

代码: MSC()

技术说明: 变更内螺纹为细牙螺纹



选型方法 MSC10

D	MSC
12	8
13	8
15	8 10
16	8 10
18	8 10 12
20	8 10 12 14
螺距	10 125 15

① 选型时, 须将M变更为MSC。
② 选型时, M与MSC须变为相同尺寸。
③ 台阶内螺纹型不适用。

