



型号		3弯曲	链节数	O+÷×N	安装尺寸		实际安装	外宽	节距	最大电缆	最大架空	最大允许	最大允许	重量(kg/m) AHQ25 AHF25		
●代码	2内宽C	半径R	4 N		Н	D	K	高度HF	É	P	直径	最大架空 长度(m)	最大允许 行程(m)	垂直悬挂(m)	AHQ25	AHF25
AHQ25 AHF25	38	(55)		AHJ25-C38	150	125	290	185	58	46	22	1.3	70	30		
		75			190	145	350	225								
		100			240	170	430	275							≈0.91	≈0.98
		125			290	195	510	325								
		150			340	220	590	375								
	50	(55)	1~	AHJ25-C50	150	125	290	185	70							
		75			190	145	350	225								
		100			240	170	430	275							≈1.02	≈1.11
		125			290	195	510	325								
		150			340	220	590	375								
	75	(55)		AHJ25-C60	150	125	290	185	95							
		75			190	145	350	225								
		100			240	170	430	275							≈1.11	≈1.23
		125			290	195	510	325								
		150			340	220	590	375								
		(55)		AHJ25-C75	150	125	290	185							≈1.22	≈1.34
		75			190	145	350	225								
		100			240	170	430	275								
		125			290	195	510	325								
		150			340	220	590	375								
AHQ25		55		AHJ25-C103	150	125	290	185	123							
		75			190	145	350	225								
	103	100				170	430	275							≈1.35	_
		125			290	195	510	325								
		150			340	220	590	375								

①AHF25无()内规格。

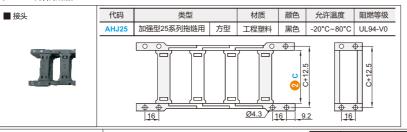

型号								
1代码	❷内宽C							
	38							
	50							
AHJ25	60							
	75							
	103							

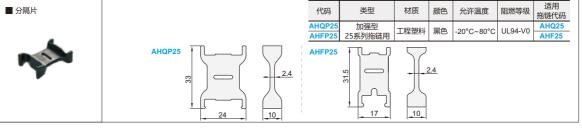

深圳市仕瑞达自动化设备有限公司

08

