



定位销

小头球面型 D P公差选择



■请按步骤①~④选择型号和参数后进行订购。

型号(①代码·②D公差·③P公差·④D)

DAKQSAGS10
DASKQDPS8

— ⑤P — ⑥L — ⑦B
— P8.00 — L10 — B8.0
— P5.50 — L8 — B5.0



型号区分:

代码

7


天发货




代码		材质	表面处理	硬度
圆型	多棱型			
DAKQSA	DAKQSD	SKS3	—	淬火硬度60~63HRC
DAGKQSA	DAHCKRL	SKS3	镀硬铬抛光 厚度3~5μm	淬火硬度50~55HRC 镀层硬度 750HV~
DACKQSA	—	SUS440C	—	淬火硬度50~55HRC
DASKQSA	DASKQSD	SUS304	—	—
—	DAHCSSR	SUS440C	—	淬火硬度48~53HRC

■公差选择


D 或 P	②·③D·P公差				
	M	P	G	H	S
	m6	p6	g6	h7	—
1.50 ~ 3.00	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010	0 -0.01
3.01 ~ 6.00	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012	
6.01 ~ 10.00	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015	
10.01 ~ 18.00	+0.018 +0.007	+0.028 +0.016	-0.006 -0.017	0 -0.018	
18.01 ~ 20.00	+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	0 -0.021	

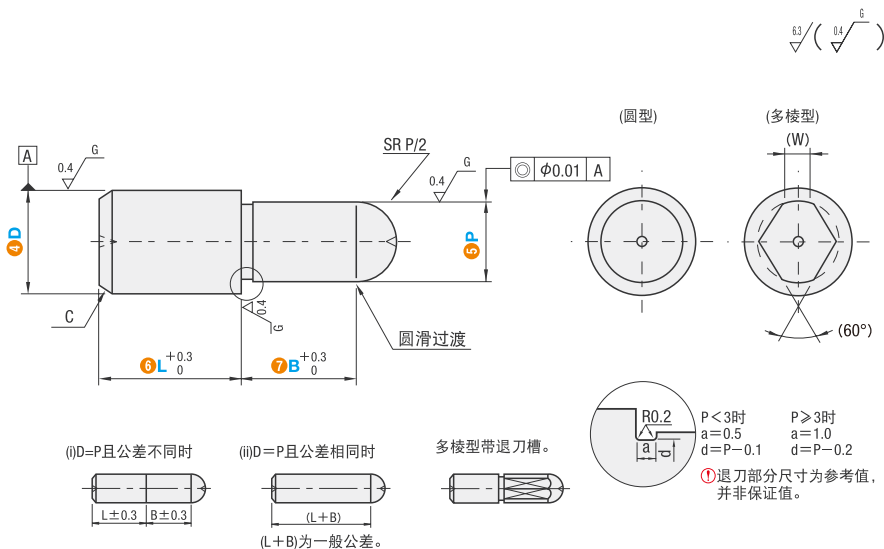


(i) D=P且公差不同时



(ii) D=P且公差相同时



多棱型带退刀槽。



P < 3时
a=0.5
d=P-0.1

P > 3时
a=1.0
d=P-0.2

①退刀部分尺寸为参考值，并非保证值。

型号				⑤P 最小单位0.01mm	⑥L 最小单位1mm	⑦B 最小单位0.1mm	C	(W)
①代码	②D公差 选择	③P公差 选择	④D					
<圆型> DAKQSA DAGKQSA DACKQSA DASKQSA	<多棱型> ①适用于D≥4 DAKQSD DASKQSD DAHCKRL DAHCSSR	M P G H	2	1.50~2.00	2~5	2.0~10.0	0.3	—
			3	1.50~3.00	3~10	2.0~10.0	0.5	1
			4	1.50(2.00)~4.00	4~10	2.0~10.0	1	1
			5	2.00~5.00	5~10	2.0~15.0(10.0)	1	1.2
			6	2.00~6.00	5~17	2.0~15.0	1	1.5
			8	3.00~8.00	8~21	2.0~20.0(15.0)	1.5	1.8
			10	3.00~10.00	10~23	3.0~20.0	2	2.2
			12	5.00~12.00	12~24	3.0~30.0(25.0)	2	2.5
			13	6.00~13.00	13~26	5.0~30.0(25.0)	2	3
			16	10.00~16.00	16~32	5.0~30.0	3	4
			20	13.00~20.00	20~40	5.0~30.0	3	5

①P·B()尺寸适用于多棱型。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613