



定位销

◀ 一体型夹具定位销固定座

新增



DABQCB12 — P10 — B9 — L100 — A30 — E5 — M8
DABRCB12 — P10 — B9 — L100 — A30 — E5 — W20 — S20 — N6

■ 请按步骤①~④选择
型号和参数后进行订购




型号区分：
代码 7 天发货

代码	类型	材质	硬度	
DABQC	内螺纹型	S45C	—	
DABQCR			淬火硬度38 ~43HRC	
DABWC	外螺纹型		—	
DABWCR			淬火硬度 38~43 HRC	
DABRC	关节安装型		—	
DABRCR			淬火硬度 38~43 HRC	


M×P	
外螺纹型	内螺纹型
M6×1.0	—
M8×1.25	
M10×1.5	M10×1.25
—	M14×1.5
—	M18×1.5




内螺纹型 DABQC
DABQCR

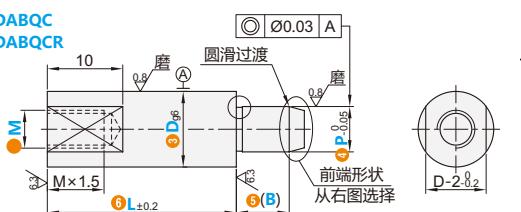

外螺纹型 DABWC
DABWCE

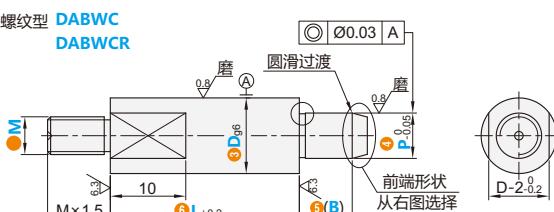

关节安装型 DABRO

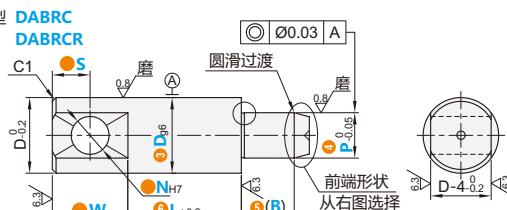

② 前端形状选择图	
B	<p>锥型</p>  <p>① 留有中心孔 $R/2$ ② $P-2-Etan(A/2) \geq 2$</p>
R	<p>锥头R型</p>  <p>① 留有中心孔 ② $e = P/2 + tan(A/2) \cdot R + R \cdot sin(A/2)$</p>

型号			最小单位0.1	最小单位1		A	最小单位1	M		R
①代码	②前端形状	③Dg6	④P	⑤B	⑥L	E(B形)	外螺纹型	内螺纹型		
内螺纹型 DABQC DABQCR	外螺纹型 DABWC DABWCR	B R	12	-0.006	6.0~11.0	5~35 (B≤P×4)	60~160	30	6 8	8
			16	-0.017	6.0~15.0			60	6 8 10	8 10
			20		6.0~16.0			90	10 14	
			25	-0.007				120	6 10	10 14 18
			32	-0.020	16.0~24.0					4

型号			最小单位0.1	最小单位1		A	最小单位1			N(H7)	R
①代码	②前端形状	③Dg6	④P	⑤B	⑥L		⑦E(B形)	⑧W	⑨S		
关节安装型 DABRC DABRCR	B R	12	-0.006 -0.017	6.0~11.0	5~35 (B≤P×4)	60~160	30	1~10	15~40	6 8	3
		16	6.0~15.0	60			6 8 10				
		20	6.0~16.0	90			10 12				
		25	-0.007 -0.020	120			10~30	12		4	
		30	16.0~24.0								



型号(①代码·②前端形状·③P) = ④P - ⑤B - ⑥L = ⑦A - ⑧E - ⑨M = (TC()·NC())

DABQCB12 – P10 – B9 – L100 – A30 – E5 – M8 – NC7

代码	技术说明	代码	技术说明												
TC()	<p>增加扳手槽</p>  <p>TC() X()</p> <p>D</p> <p>D-2</p> <p>① 最小单位1</p> <p>选型方法 TC10-X10</p>	NC()	<p>变更关节安装部宽度</p>  <p>D</p> <p>NCL()</p> <p>① 最小单位1</p> <p>选型方法 NC20</p> <table border="1"> <tr><td>D</td><td>NC</td></tr> <tr><td>12</td><td>7</td></tr> <tr><td>16</td><td>9~11</td></tr> <tr><td>20</td><td>12~15</td></tr> <tr><td>25</td><td>14~20</td></tr> <tr><td>30</td><td>20~25</td></tr> </table>	D	NC	12	7	16	9~11	20	12~15	25	14~20	30	20~25
D	NC														
12	7														
16	9~11														
20	12~15														
25	14~20														
30	20~25														

询价④种方式