




型号(1代码·2T) — (3D) — (4M) 型号(1代码·2H) — (3A) 型号(1代码·2H) — (3D) — (4形状) ■ 请按步骤①~④选择型号和参数后进行订购。



型号区分: 7 天发货


■ 环型

| 代码     | 类型 | 材质   | 硬度           | 表面处理 |
|--------|----|------|--------------|------|
| DBDVCH | 环型 | S45C | 淬火硬度39~45HRC | 发黑   |

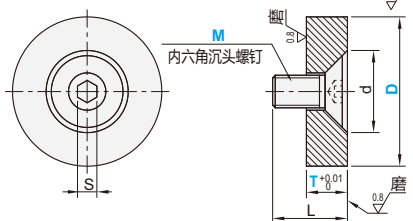

■ 可调节型

| 代码     | 类型   | 材质   | 硬度           | 表面处理 |
|--------|------|------|--------------|------|
| DBDWCH | 可调节型 | S45C | 淬火硬度39~45HRC | 发黑   |



| 型号     | 1代码 | 2T | 3D | 4M   | d | S    | L    |
|--------|-----|----|----|------|---|------|------|
| DBDVCH | 5   | 25 | M6 | 14   | 4 | 12.7 | 20.7 |
|        |     | 30 |    |      |   |      |      |
|        |     | 35 |    |      |   |      |      |
|        |     | 25 |    |      |   |      |      |
|        |     | 30 |    |      |   |      |      |
|        |     | 35 |    |      |   |      |      |
|        | 10  | 30 | M8 | 19.4 | 5 | 21.3 | 26.3 |
|        |     | 35 |    |      |   |      |      |
|        |     | 40 |    |      |   |      |      |
|        |     | 30 |    |      |   |      |      |
|        |     | 35 |    |      |   |      |      |
|        |     | 40 |    |      |   |      |      |

| 型号     | 1代码 | 2H  | 3A | B  | E  | F  | W  | h  | M   |
|--------|-----|-----|----|----|----|----|----|----|-----|
| DBDWCH | 32  | 90  | 50 | 30 | 50 | 17 | 15 | 23 | M16 |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |
|        | 32  | 140 | 50 | 30 | 50 | 17 | 15 | 23 | M16 |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |
|        |     |     |    |    |    |    |    |    |     |

■ 螺栓型/内螺纹型



| 代码     | 类型   | 材质   | 硬度    | 表面处理     |
|--------|------|------|-------|----------|
| DBDXCH | 螺栓型  | S45C | 40HRC | 发黑(渗碳淬火) |
| DBDYCH | 内螺纹型 |      |       |          |





螺栓型

DBDXCH



前端研磨型  
形状:A



前端R型  
形状:B





前端带齿型  
形状:C





内螺纹型

DBDYCH



前端研磨型  
形状:A



前端R型  
形状:B



前端带齿型  
形状:C



■ 螺栓型

| 型号     | 1代码 | 2H | 3D | 4形状 | L   | M  | S    | e    |
|--------|-----|----|----|-----|-----|----|------|------|
| DBDXCH | 10  | 17 | A  | 20  | M8  | 17 | 19.4 | 25.2 |
|        |     | 22 |    |     |     |    |      |      |
|        |     | 22 |    |     |     |    |      |      |
|        |     | 30 |    |     |     |    |      |      |
|        | 15  | 22 | B  | 29  | M12 | 22 | 25.2 | 33   |
|        |     | 30 |    |     |     |    |      |      |
|        |     | 30 |    |     |     |    |      |      |
|        |     | 30 |    |     |     |    |      |      |

■ 内螺纹型

| 型号     | 1代码 | 2H | 3D | 4形状 | M  | h  | S    | e    |
|--------|-----|----|----|-----|----|----|------|------|
| DBDYCH | 15  | 17 | A  | M8  | 6  | 17 | 19.4 | 25.2 |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |
|        | 25  | 22 | B  | M12 | 10 | 22 | 25.2 | 33   |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |
|        |     |    |    |     |    |    |      |      |

