



型号(1)代码(2)D) — (3)L — (4)F  
 BDNPR15 — 120 — F100  
 BDSNPP20 — 80 — F60

■请按步骤①~④选择型号和参数后进行订购。




型号区分: 7天发货



| D公差 (g6) |                  |
|----------|------------------|
| 3        | -0.002<br>-0.008 |
| 4~6      | -0.004<br>-0.012 |
| 8·10     | -0.005<br>-0.014 |
| 12~16    | -0.006<br>-0.017 |
| 20·25    | -0.007<br>-0.020 |

| 代码     | 材质     | 表面处理  | 附件   |        |
|--------|--------|-------|------|--------|
| BDNPR  | S45C   | 发黑    | 挡圈4个 | 弹簧钢    |
| BDBSCN |        | 无电解镀锌 |      |        |
| BDSNPR | SUS304 | -     |      | SUS304 |

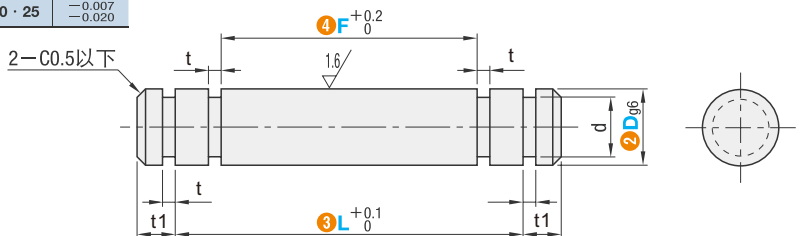


| 型号                        |      | 最小单位 1mm |        | t1   | d    | 公差          | t    | 公差         |
|---------------------------|------|----------|--------|------|------|-------------|------|------------|
| 1 代码                      | 2 D  | 3 L      | 4 F    |      |      |             |      |            |
| BDNPR<br>BDBSCN<br>BDSNPR | 3    | 8~60     | 5~47   | 2    | 2    | +0.06<br>0  | 0.5  | +0.05<br>0 |
|                           | 4    | 9~60     | 5~48   |      | 3    |             |      |            |
|                           | 5    | 14~60    | 10~56  |      | 4    | +0.075<br>0 |      |            |
|                           | 6    | 14~100   | 10~96  |      | 5    | 0           |      |            |
|                           | 8    | 14~100   | 10~96  | 3    | 7    | +0.09<br>0  | 0.9  | +0.14<br>0 |
|                           | 10   | 20~100   | 15~95  |      | 9.6  | -0.09       |      |            |
|                           | 12   | 20~150   | 15~145 |      | 11.5 | 0<br>-0.11  | 1.15 |            |
|                           | 13   | 30~150   | 25~145 |      | 12.4 |             |      |            |
|                           | 14   |          |        | 13.4 |      |             |      |            |
|                           | 15   |          |        | 14.3 |      |             |      |            |
|                           | 16   | 35~150   | 30~145 | 4    | 15.2 | 0<br>-0.21  | 1.35 |            |
|                           | 20   |          |        |      | 19   |             |      |            |
| 25                        | 23.9 |          |        |      |      |             |      |            |



| D公差 (g6) |                  |
|----------|------------------|
| 8·10     | -0.005<br>-0.014 |
| 12~16    | -0.006<br>-0.017 |
| 20·25    | -0.007<br>-0.020 |

| 代码     | 材质     | 表面处理  | 附件   |        |
|--------|--------|-------|------|--------|
| BDNPP  | S45C   | 发黑    | 挡圈2个 | 弹簧钢    |
| BDBTCN |        | 无电解镀锌 |      |        |
| BDSNPP | SUS304 | -     |      | SUS304 |

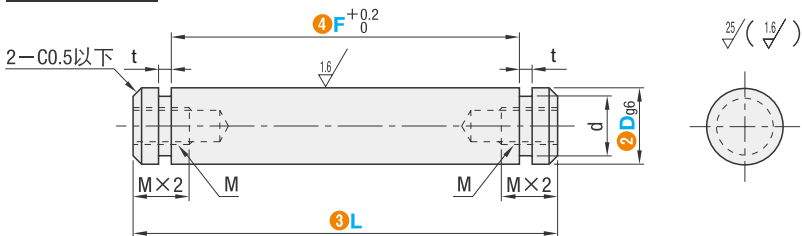

| 型号                        |     | 最小单位 1mm |        | M<br>(粗牙螺纹) | d    | 公差         | t   | 公差        |
|---------------------------|-----|----------|--------|-------------|------|------------|-----|-----------|
| 1 代码                      | 2 D | 3 L      | 4 F    |             |      |            |     |           |
| BDNPP<br>BDBTCN<br>BDSNPP | 8   | 14~100   | 10~96  | M4          | 7    | +0.09<br>0 | 0.9 | +0.1<br>0 |
|                           | 10  | 20~100   | 15~95  |             | 9.6  | -0.09      |     |           |
|                           | 12  | 20~150   | 15~145 | M6          | 11.5 | 0<br>-0.11 | 1.2 |           |
|                           | 13  | 30~150   | 25~145 |             | 12.4 |            |     |           |
|                           | 14  |          |        |             | 13.4 |            |     |           |
|                           | 15  |          |        |             | 14.3 |            |     |           |
|                           | 16  | 35~150   | 30~145 | M8          | 15.2 | 0<br>-0.21 | 1.4 |           |
|                           | 20  |          |        |             | 19   |            |     |           |
|                           | 25  |          |        |             | 23.9 |            |     |           |



邮箱: Service@srdfaa.com



传真: 0755-8957-5523