



型号(1)代码·(2)D — (3)L
 BDLBM15 — 90.3
 BDSLBM15 — 90.3

■ 请按步骤①~③选择
 型号和参数后进行订购。




型号区分: 代码 **7** 天发货

■ 两端内螺纹型



| D公差 (g6) | |
|----------|------------------|
| 6 | -0.004 -0.012 |
| 8 · 10 | -0.005 -0.014 |
| 12~16 | -0.006 -0.017 |
| 20 · 25 | -0.007 -0.020 |

| 代码 | 材质 | 硬度 | 表面处理 |
|---------|---------|------------------------|---------------|
| BDLBM | S45C | — | — |
| BDLBHM | | 40~45HRC | — |
| BDPLBM | | — | 无电解镀锌 |
| BDPLBHM | | 40~45HRC | — |
| BDBGCL | SUS304 | 40~45HRC 镀层硬度850HV~ | 镀铬, 镀层厚度3~5μm |
| BDSLBM | | — | — |
| BDSLBMH | SUS440C | 45~50HRC | — |

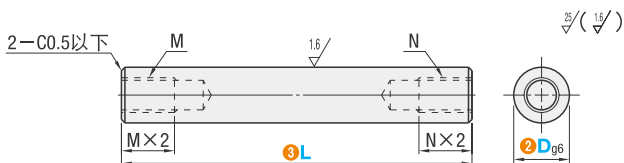

型号


| 1 代码 | 2 D | 3 L 最小单位0.1mm | M (粗牙螺纹) | N (粗牙螺纹) |
|---|-----|------------------|-------------|-------------|
| BDLBM BDLBHM BDPLBM BDPLBHM BDBGCL BDSLBM BDSLBMH | 6 | 20.0~100.0 | M 3 | M 3 |
| | 8 | | M 5 | M 5 |
| | 10 | | M 6 | M 6 |
| | 12 | | M 8 | M 8 |
| | 15 | | M10 | M10 |
| | 16 | | M12 | M12 |
| | 20 | | M16 | M16 |
| | 25 | | M16 | M16 |

■ 两端外螺纹型



| D公差 (g6) | |
|----------|------------------|
| 6 | -0.004 -0.012 |
| 8 · 10 | -0.005 -0.014 |
| 12~18 | -0.006 -0.017 |
| 20 · 25 | -0.007 -0.020 |

| 代码 | 材质 | 硬度 | 表面处理 | 附件 | |
|--------|--------|----------|-------|--------|-------|
| BDLBN | S45C | — | 发黑 | 螺母2个 | SWRCH |
| BDLBHN | | 40~45HRC | | | |
| BDBHCN | | — | 无电解镀锌 | | |
| BDBGCN | | 40~45HRC | | | |
| BDSLBN | SUS304 | — | — | SUS304 | |

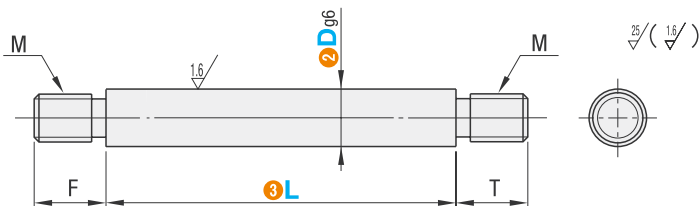

型号

| 1 代码 | 2 D | 3 L 最小单位0.1mm | F · T | N (粗牙螺纹) |
|---|-----|------------------|---------------------------|-------------|
| BDLBN BDLBHN BDBHCN BDBGCN BDSLBN | 6 | 15.0~100.0 | 9 12 16 18 24 | M 5 |
| | 8 | 20.0~100.0 | | M 6 |
| | 10 | 25.0~100.0 | | M 8 |
| | 12 | 25.0~150.0 | | M10 |
| | 15 | 30.0~150.0 | | M12 |
| | 16 | | | M16 |
| | 20 | 35.0~150.0 | | M20 |
| | 25 | | | M20 |

