



滚珠丝杠/支座组件

整合型传动座 简易型

新增

滚珠丝杠
组件



型号 ① 代码 · ② d — ③ F — ④ h
AIEI8 — 38 — 21




■ 请按步骤 ①~④ 选择
型号和参数后进行订购。




型号区分: 5 天发货



代码	类型	材质	表面处理		附件
			主体	丝杠/螺母	
AIEI	整合型传动座 简易型	铝合金	S50C	本色阳极氧化 发黑	调整环:2个 锁紧螺母:1个

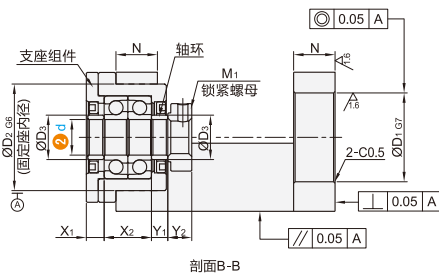

适用规格: AIEI20-60



型号				适用 电机类型	D ₁	P.C.D	M ₂	B ₁	B ₂	D ₂	D ₃	Z	H ₁	H ₂	J	K	L	
代码	适用丝杠轴径 ② d	适用电机法兰 ③ F	中心高 ④ h															
AIEI	8	38	21	伺服电机	30	45	M3	67	9	28	11.5	64	41	19	43	40	10	
		40				46	M4											
		38				45	M3											
	10	40	25		30	46	M4	74	13	34	14	70	46	23	46	42	10	
		38				45	M3											
		40				46	M4											
	12	38	31		50	45	M3	84	13	36	15	72	47	26	56	62	13	
		40				46	M4											
		60				97												
	15	60	41		70	70	M5	106	15	40	20	98	62	82	36	72	82	16
		80				90	M6											
		60				50	M5											
	20	60	35		70	50	M5	117	22	57	25	116	70	30	69	70	20	
		80				70	M6											
		80				70	M6											

适用丝杠轴径 ② d	适用电机法兰 ③ F	N	Q	L ₁	T ₁	W ₁	W ₂	X ₁	X ₂	Y ₁	Y ₂	M ₁ (细牙螺纹)	S	建议丝杠支座		建议电机规格	
														固定侧	支撑侧	止口规格	安装P.C.D
8	38	12	12	47	52	40	35	5	14	5.5	6.5	M8×1.0	5.5	AIRW8	—	30	45
	40														46		
10	38	14	14	54	56	42	42	8	16	5.5	8	M10×1.0	6.5	AIRW10	AIUN10	30	45
	40														46		
12	38	14	14	54	58	44	44	8	16	5.5	8	M12×1.0	8.5	AIRW12	AIUN12	30	45
	40														46		
15	60	17	18	58	80	62	52	8	18	10	10	M15×1.0	10.5	AIRW15	—	30	70
	80														90		
20	60	24	23	77	94	70	68	14	28	11	13	M20×1.0	10.5	AIRW20	—	30	70
	80														90		

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613