



# 定位销

## 直杆锥头型 标准/内螺纹



型号(1代码·2D公差·3D) — (4L) — (5E) — (6A°)  
**DALSTAM6** — L14.0 — E2.5 — A30

■请按步骤1~6选择型号和参数后进行订购。



型号区分: 代码 **7** 天发货

定位销  
夹具衬套

20

### ■标准型




#### ■D尺寸公差选择

D	D尺寸公差			
	M	P	G	H
	m6	p6	g6	h7
1~3	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	0 -0.010
4~6	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012
8·10	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015

代码	材质	表面处理	硬度
<b>DALSTA</b>	SKS3	-	淬火硬度60~63HRC
<b>DAGLSTA</b>	SKS3	镀铬层厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
<b>DACLSTA</b>	SUS440C	-	淬火硬度50~55HRC
<b>DASLSTA</b>	SUS304	-	-
<b>DAJLSL</b>		镀铬层 厚度3~5μm	镀层硬度850HV~

$$\sqrt[6.3]{\frac{L}{D}}$$

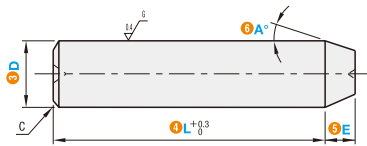

型号		3D	4L 最小单位0.1mm	5E 最小单位0.1mm	6A° 选择	C
1代码	2D公差					
<b>DALSTA</b> <b>DAGLSTA</b> <b>DACLSTA</b> <b>DASLSTA</b> <b>DAJLSL</b>	M P G H	1	3.0~10.0	0.5~10.0	15 30 45 60	0.1
		2	3.0~20.0			0.5
		3	3.0~20.0			0.5
		4	3.0~25.0			1
		5	4.0~30.0			1
		6	5.0~40.0			1.5
		8	5.0~40.0			1
		10				2



型号(1代码·2D公差·3D) — (4L) — (5E) — (6A°)  
**DALSTTAG8** — L29.3 — E8.3 — A15

■请按步骤1~6选择型号和参数后进行订购。



型号区分: 代码 **8** 天发货

### ■内螺纹型





#### ■D尺寸公差选择

D	D尺寸公差			
	M	P	G	H
	m6	p6	g6	h7
6	+0.012 +0.004	+0.020 +0.012	-0.004 -0.012	0 -0.012
8·10	+0.015 +0.006	+0.024 +0.015	-0.005 -0.014	0 -0.015

代码	材质	表面处理	硬度
<b>DALSTTA</b>	SKS3	-	淬火硬度60~63HRC
<b>DAGLSTTA</b>	SKS3	镀铬层 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
<b>DACLSTTA</b>	SUS440C	-	淬火硬度50~55HRC
<b>DASLSTTA</b>	SUS304	-	-
<b>DAJCSL</b>	SUS304	镀铬层 厚度3~5μm	镀层硬度850HV~

$$\sqrt[6.3]{\frac{L}{D}}$$

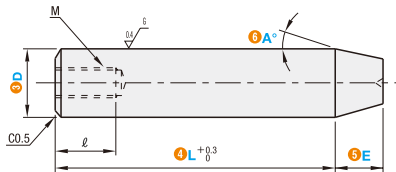

型号		3D	4L 最小单位0.1mm	5E 最小单位0.1mm	6A° 选择	M (粗牙螺纹)	ℓ
1代码	2D公差						
<b>DALSTTA</b> <b>DAGLSTTA</b> <b>DACLSTTA</b> <b>DASLSTTA</b> <b>DAJCSL</b>	M P G H	6	10.0~40.0	0.5~10.0	15 30 45 60	M3	5
		8	15.0~40.0			M5	8
		10				M5	8

询价4种方式



官网 <http://www.srdfaa.com>  
 深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863  
 客服热线 0755-27926613