



轴承、轴承座组件

精密锁紧螺帽/轴承螺帽用勾扳手




型号
BAPNY20



型号区分:
交货期 5 天发货

精密锁紧螺帽

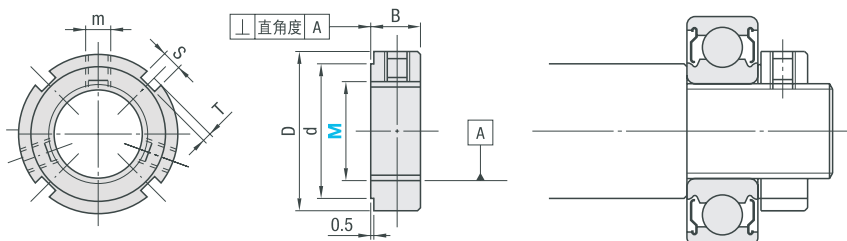

构成零件	材质	硬度	表面处理
主体	SCM440	28~32HRC	发黑
固定螺丝	SCM435	35~40HRC	发黑
锁紧金属片	磷青铜	—	—

螺纹精度
ISO 4H 等级

型号	M	M×螺距 (细牙螺纹)	D	d	B	S	T	m	端面垂直度 (Max.)	最大紧固扭矩(N·m) 固定螺丝
代码	M									
(标准型) BAPNY	8	8×0.75	16	11	8	3	2	2×M4	· BAPNY 0.005	3.5
	10	10×1.0	18	13				2×M5		
	12	12×1.0	20	16				3×M5		
	15	15×1.0	25	21						
	17	17×1.0	28	23	10	4	2		· BAPNY 0.005	4.5
	20	20×1.0	32	27						
	25	25×1.5	38	33						
	30	30×1.5	45	40						
	35	35×1.5	52	47	12	5	2.5	3×M6	· BAPN 0.002	8
	40	40×1.5	58	52						
(高级型) BAPN	45	45×1.5	65	59	14	6	3			
	50	50×1.5	70	64						
	55	55×2.0	75	68						
	60	60×2.0	80	73				3×M8		




型号
BAFK20



型号区分:
交货期 5 天发货

轴承螺帽用勾扳手

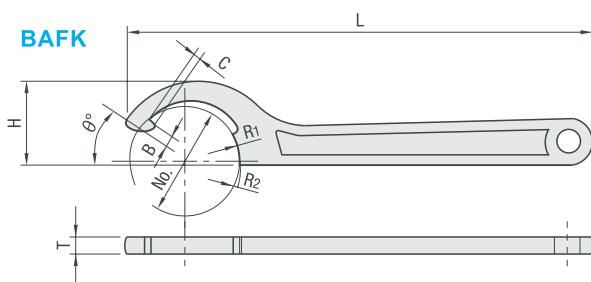

材质 铬钒钢
表面处理 阳离子电沉积涂覆

型号		R ₁	R ₂	B	C	θ	T	H	L	适用外形	适用的螺帽 轴承螺帽	
代码	No.											
BAFK	16	8	10	1.5	2	30°	4	11	108	φ16 · φ18	M8 · M10	
	20	10	11							φ20 · φ22	M12	
	25	12.5	14	2	2.3		5	20	136	φ25 · φ28	M15 · M17	
	30	15	16							φ30 · φ32	M20	
	34	17	19	2.5	2.5	35°	6	28	160	φ34 · φ38	M25	
	45	22.5	24							φ45 · φ48	M30	
	52	26	27.5				6.5	41	208	φ52 · φ55	M35	
	58	29	32.5							φ58 · φ65	M40 · M45	
	65	32.5	35	3.5	3		8.5	46	232	φ65 · φ70	M45 · M50	
	70	35	37.5							φ70 · φ75	M50 · M55	

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613