



定位销/夹具衬套

定位销 大头圆锥型

外螺纹型·P尺寸固定型



型号(1代码·2D) — (3P)
DAJRBNB6 — 10

■请按步骤①~④选择型号和参数后进行订购。




型号区分: 7天发货
代码

定位销
夹具衬套

20




代码 外螺纹型	材质	表面处理	硬度
DAJRBNB	SKS3	—	淬火硬度60~63HRC
DAGJRBNB	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACJRBNB	SUS440C	—	淬火硬度50~55HRC
DASJRBNB	SUS304	—	—

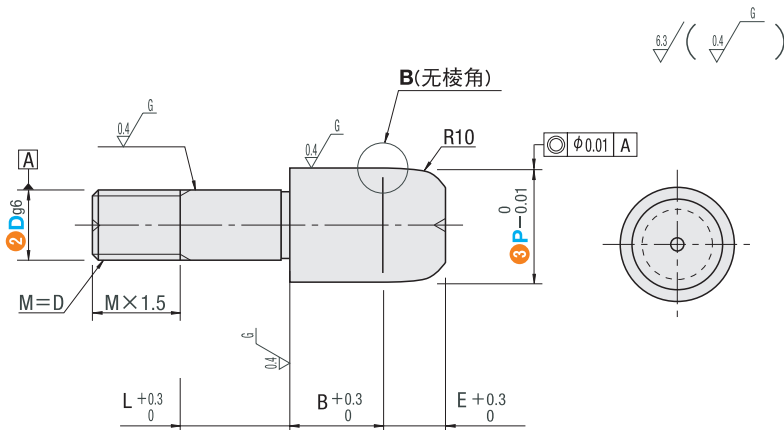

■D尺寸公差

D	g6
3	-0.002 -0.008
4	-0.004 -0.012
5	-0.005 -0.014
6	-0.006 -0.017
8	-0.007 -0.020
10	-0.007 -0.020
12	-0.007 -0.020
16	-0.007 -0.020
20	-0.007 -0.020



①B放大图



型号		③P选择	L	B	E	M (粗牙螺纹)
①代码	②D					
DAJRBNB DAGJRBNB DACJRBNB DASJRBNB	3	4 5 6	5	5	3	M3
	4	5 6	5	6	4	M4
	5	6 8	10	6	4	M5
	6	8 10	10	8	5	M6
	8	10 12 13	15	8	5	M8
	10	12 13 15	15	10	5	M10
	12	13 15 16	15	10	6	M12
	16	20 25	22	10	7	M16
	20	25 30	30	15	7	M20

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613