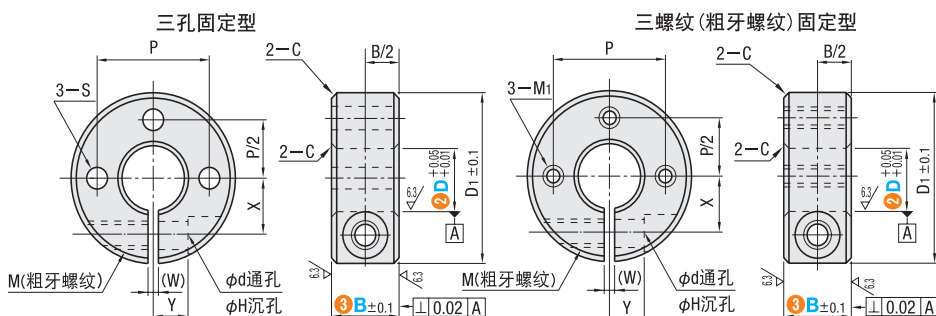


开口三孔固定型
开口型三螺纹（粗牙螺纹）固定型

代 码	材 质	表 面 处 理	附 件
三孔固定型 ACST ACPST AC SST	三螺纹固定型 ACSTR ACPSTR ACSSTR	S45C SUS304	发黑 无电解镀镍 —
			1个内六角螺栓 1个内六角螺栓 (SUS)

① D ± 0.05 _{+0.01}为线切割加工前的公差。

25/(6.3/)

① 代码 ② D — ③ B
ACST12 — 10

■ 请按步骤①~③选择型号和参数后进行订购。

型号区分：
代码 7 天发货

型号		③ B 选择	D ₁	M (粗牙螺纹)	d	H	(W)	C	X	Y	P	三孔型 S	三螺纹型 M ₁ (粗牙螺纹)
① 代 码	② D												
(三孔型) ACST ACPST AC SST (三螺纹型) ACSTR ACPSTR ACSSTR 三螺纹型仅可选择 B尺寸带*的。	6	* 8	20	M3	3.4	6	1	0.5	6	4	12	3.5	M3
		* 10		M4	4.5	7.5							
	8	* 8	25	M3	3.4	6	1.5	0.5	8	5	14	3.5	M4
		* 10		M4	4.5	7.5					18	4.5	-
		* 15		M6	6.6	12					20	5.5	M5
	10	* 8	30	M3	3.4	6	1.5	0.5	9	5	20	5.5	M5
		* 10		M4	4.5	7.5							
		* 12		M5	5.5	9					6	24	6.6
		* 15		M6	6.6	12							
	12	* 8	30	M3	3.4	6	1.5	0.5	10	5	22	5.5	M5
		* 10		M4	4.5	7.5							
		* 12		M5	5.5	9					11	6	24
		* 15		M6	6.6	12							
	13	* 10	30	M4	4.5	7.5	1.5	0.5	10	5	22	4.5	M4
		* 12		M5	5.5	9					23	5.5	-
		* 15		M6	6.6	12					11	6	24
	15	* 10	34	M4	4.5	7.5	1.5	0.5	11.5	6	23	4.5	M4
		* 12		M5	5.5	9					26	5.5	M5
		* 15		M6	6.6	12					13	8	28
	16	* 10	35	M5	5.5	9	1.5	0.5	12	6	24	4.5	-
		* 12		M5	5.5	9					26	5.5	M5
		* 15		M6	6.6	12					13	8	28
	20	* 10	40	M5	5.5	9	1.5	0.5	14	7	28	4.5	M4
		* 12		M5	5.5	9					30	5.5	M5
		* 15		M6	6.6	12					15	8	34
	25	* 12	45	M5	5.5	9	1.5	0.5	17	7	36	5.5	M5
		* 15		M6	6.6	12					18	10	38
											18	10	38
	30	* 15	55	M6	6.6	12	1.5	1	20	10	44	6.6	M6
	35	* 15	60	M6	6.6	12	2	1	23	12	48	6.6	M6
	40	* 18	70	M8	9	14	2	1	26	13	56	9	M8
	50	* 22	85	M10	11	18	3	1	32	16	68	11	-



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达