



小零件/磁铁

弹簧销/定位销拉拔器



型号 (1 代码 · 2 D) — (3) L
EAPR5 — 40

■ 请按步骤 ①~④ 选择型号和参数后进行订购。



型号区分: 代码 **5** 天发货

小零件·磁铁

30

■ 弹簧销





L	L尺寸公差
5~10	+0.5 0
12~50	+1.0 0
56~100	+1.5 0

代码	材质	硬度
EAPR	弹簧钢	45~50HRC
EASPSR	不锈钢弹簧钢	42~48HRC

EAPR



EASPSR
(不锈钢)

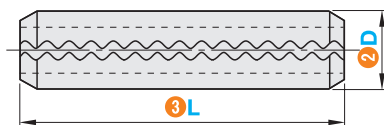

型号		③ L	* kN		t(参考)		D	
① 代码	② D		EAPR	EASPSR	EAPR	EASPSR	min	max
EAPR (D2~10)	2	5 6 8 10 12 14 16 18 20	2.76	2.76	0.4	0.4	2.15	2.25
	3	6 8 10 12 14 16 18 20 22 25 28 32	6.2	6.2	0.6	0.6	3.15	3.25
	4	8 10 12 14 16 18 20 22 25 28 32 36 40	10.8	10.8	0.8	0.8	4.2	4.4
EASPSR (D2~6)	5	10 12 14 16 18 20 22 25 28 32 36 40 45 50	17.25	17.25	1	1	5.2	5.4
	6	12 14 16 18 20 22 25 28 32 36 40 45 50 56	24.83	24.83	1.2	1.2	6.2	6.4
	8	16 18 20 22 25 28 32 36 40 45 50 56 63 70 80	44.13	—	1.6	—	8.3	8.6
	10	18 20 22 25 28 32 36 40 45 50 56 63 70 80 90 100	68.94	—	2	—	10.3	10.6

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613