



链轮/链条

【传动用】链轮、链条

40B系列 / 08A

■ 请按步骤①~④选择型号和参数后进行订购。

链条

节数指定型

型号

CEE40

链条

400

链轮

型号(①代码·②齿数)

CE40B20

规格

N

轴孔直径

20




7天发货

■ 链条40B



代码	材质
CEE40	钢
CEES40	SUS304

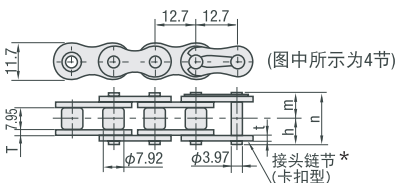

* 附带接头链节，需自行安装。

■ 节数指定型

型号	节数指定 (指定偶数)	h	m	n	t	容许 最大张力(kN)	节距(p)
(链条)CEE40	4~	8.02	9.53	17.55	1.5	3.63	12.7
(链条)CEES40	4~	8.02	9.53	17.55	1.5	0.44	


■ 链轮40B




代码	材质	表面处理	附件
CE40B	S45C	—	固定螺丝
CEB40B	(齿顶高频淬火)	发黑	(仅轴孔规格N)
CES40B	SUS304	—	

■ 轴孔加工尺寸表

轴孔直径D	键槽b2×t2	固定螺丝M
10K~12	4×1.8	5
14~17	5×2.3	6
18~22	6×2.8	6
24~30	8×3.3	8
32~35	10×3.3	8
40	12×3.3	8



轴孔规格③S 轴孔规格③N
(底孔) (新JIS键+螺纹孔)



① 齿顶和键槽的偏移量为±0.5mm

型号		③轴孔规格	④轴孔直径		Dp	Do	盖板			ℓ
①代码	②齿数		S规格 (Dh8)	N规格 (Dh7)			H	GD	L	
CE40B CEB40B	9	S	9	12 14	37.13	42	28	23	22	5
	10		9	12 14 15 16 17	41.1	46	32	27		
	11		10	12 14 15 16 17 18 19 20	45.08	51	36	31		
	12		10	12 14 15 16 17 18 19 20 22	49.07	55	40	35		
	13		12	12 14 15 16 17 18 19 20 22	53.07	59	37			
	14		12	12 14 15 16 17 18 19 20 22 24 25*	57.07	63	42			
	15		12	12 14 15 16 17 18 19 20 22 24 25 28 30*	61.08	67	46			
	16		13	14 15 16 17 18 19 20 22 24 25 28 30 32	65.1	71	50			
	17		13	14 15 16 17 18 19 20 22 24 25 28 30 32 35	69.12	76	54			
	18		13	14 15 16 17 18 19 20 22 24 25 28 30 32 35	73.14	80	57			
	19	N	14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	77.16	84	62		25	7
	20		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	81.18	88	67			
	21		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	85.21	92	71			
	22		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	89.24	96	75			
	23		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	93.27	100	77			
	24		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	97.3	104				
	25		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	101.33	108				
	26		14	18 19 20 22 24 25 28 30 32 35 40	105.36	112				
	28		14	20 22 24 25 28 30 32 35 40	113.43	120				
	30		14	20 22 24 25 28 30 32 35 40	121.50	128				
CES40B	32	S	14	20 22 24 25 28 30 32 35 40	129.57	137			28	10
	34		14	20 22 24 25 28 30 32 35 40	137.64	145				
	35		14	20 22 24 25 28 30 32 35 40	141.68	149				
	36		16	20 22 24 25 28 30 32 35 40	145.72	153				
	38		16	24 25 28 30 32 35 40	153.79	161				
	40		16	25 28 30 32 35 40	161.87	169				
	*10	N	9	12 15 16	41.1	46	32	27	22	5
	*11		10	15 16 18 20	45.08	51	36	31		
	*12		10	15 16 18 20	49.07	55	40	35		
	13		12	15 16 18 20	53.07	59	37			
	14		12	15 16 18 19 20 22 24 25*	57.07	63	42			
	15		12	15 16 18 19 20 22 24 25 28	61.08	67	46			
	16		13	15 16 18 19 20 22 24 25 28 30	65.1	71	50			
	17		13	15 16 18 19 20 22 24 25 28 30	69.12	76	54			
	18		13	15 16 18 19 20 22 24 25 28 30	73.14	80	57			
	19		14	15 16 18 19 20 22 24 25 28 30	77.16	84	62			
	20	N	14	15 16 18 19 20 22 24 25 28 30	81.18	88	67		25	7
	21		14	18 20 22 24 25 28 30	85.21	92	71			
	22		14	18 20 22 24 25 28 30	89.24	96	75			
	23		14	18 20 22 24 25 28 30	93.27	100	77			
	24		14	18 20 22 24 25 28 30	97.3	104				
	25		14	18 20 22 24 25 28 30	101.33	108				
	26		14	20 22 25 30	105.36	112				
	28		14	20 22 25 30	113.43	120				
	30		14	20 22 25 30	121.5	128				
	32		14	20 22 25 30	129.57	137				
	35	N	14	20 22 25 30	141.68	149			28	10
	36		16	20 22 25 30	145.72	153				
	38		16	20 22 25 30	153.79	161				
	40		16	20 22 25 30	161.87	169				

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613