

调整螺栓用固定块

L型·L型侧面安装型

定位导向零件



型号 (1 代码 · 2 No.)

DBJLC10

— 30

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分:


代码

7 天发货

调整螺栓用固定块 L型



	材质	表面处理
DBJLC	S45C	发黑
DBJLCM		无电解镀镍

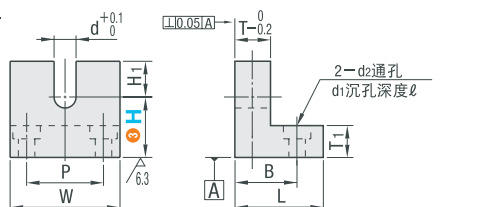


型号		③ H选择	d	H1	T	W	P	L	B	T1	d2	d1	l
① 代码	② No.												
DBJLC DBJLCM	3	15 20	2.5	5	7	26	16	16	11	7	3.5	6	3.5
	4	15 20	3.5										
	5	20 25	4.5										
	6	20 25 30	5.5	6	9	32	20	23	16	9	4.5	8	4.5
	8	20 25 30	7.5										
	10	30 35	9.5										
	12	30 35	11.5	11	19	65	40	41	30	15	9	14	9
	16	30 35	15.5										

调整螺栓用固定块 L型侧面安装型



代码	材质	表面处理
DBJSLC	S45C	发黑
DBJSLCM		无电解镀镍
DBJSLCS	SUS304	—

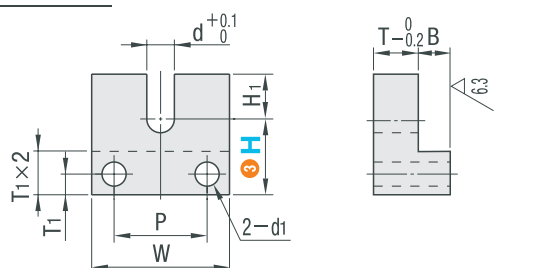

型号		③ H选择	d	H1	T	W	P	d1	T1	B
① 代码	② No.									
DBJSLC DBJSLCM DBJSLCS	3	15 20	2.5	5	7	26	16	4	4	5
	4	15 20	3.5							
	5	15 20 25	4.5							
	6	15 20 25 30	5.5	6	9	32	20	6	5	6
	8	20 25 30 40	7.5							
	10	25 30 40	9.5							
	12	25 30 40	11.5	11	19	65	40	11.5	8	10
	16	25 30 40	15.5							



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达