



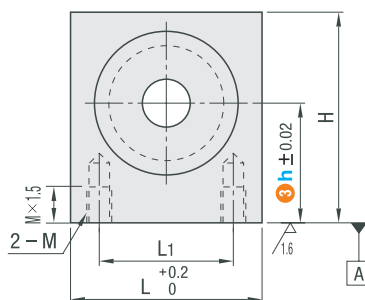

代码	材质		表面处理	附件
高度h选择型	轴承	固定座	固定座	挡圈
BBBKB	钢	S45C	发黑	弹簧钢
BBBK			无电解镀镍	SUS304
BBBKA				
BBBKSA	不锈钢	铝合金	本色阳极氧化处理	

6.3/(1.6/)

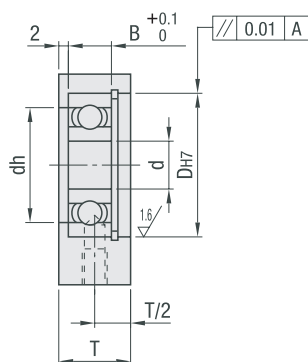

型号(①代码·②轴承型号)

BBBK6000ZZ

— ③h — 30

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分:

代码

7 天发货

型号		高度	d	H	L ₁	L	T	dh	DH7	B	M (粗牙螺纹)
① 代码	② 轴承型号	③ h									
BBBKB BBBK BBBKA BBBKSA	623ZZ	15 20 25	3	h+9	10	20	10	7	10	4	M4
	624ZZ	15 20 25	4	h+11	14	22	10	9	13	5	
	605ZZ	15 20 25	5	h+11	16	24	10	10	14	5	
	625ZZ	20 25 30	5	h+12	16	28	10	12	16	5	
	606ZZ	20 25 30	6	h+13	22	34	12	13	17	6	
	626ZZ	20 25 30	6	h+14	24	36	12	15	19	6	M5
	608ZZ	20 25 30	8	h+15	26	38	12	18	22	7	
	628ZZ	25 30	8	h+16	22	34	15	20	24	8	
	6900ZZ	25 30 40	10	h+15	20	32	12	19	22	6	
	6000ZZ	25 30 40	10	h+17	26	38	15	22	26	8	
	6200ZZ	25 30 40	10	h+19	28	40	15	24	30	9	
	6901ZZ	25 30 40	12	h+16	24	36	12	21	24	6	
	6001ZZ	25 30 40	12	h+18	28	40	15	24	28	8	M6
	6201ZZ	25 30 40	12	h+20	30	42	16	26	32	10	
	6902ZZ	30 40 50	15	h+18	30	42	12	25	28	7	
	6002ZZ	30 40 50	15	h+20	36	50	15	28	32	9	
	6202ZZ	30 40 50	15	h+22	30	44	17	29	35	11	
	6903ZZ	30 40 50	17	h+19	30	42	13	27	30	7	
	6003ZZ	30 40 50	17	h+22	36	50	16	31	35	10	
	6203ZZ	30 40 50	17	h+24	36	48	20	34	40	12	M8
	6904ZZ	40 50 60	20	h+23	31	45	15	34	37	9	
	6004ZZ	40 50 60	20	h+25	38	54	19	36	42	12	
	6204ZZ	40 50 60	20	h+28	44	60	20	40	47	14	
	6005ZZ	40 50 60	25	h+28	46	62	19	41	47	12	M10
	6205ZZ	50 80	25	h+31	50	70	22	45	52	15	
	6006ZZ	50 80	30	h+32	54	74	20	48	55	13	
	6206ZZ	50 80	30	h+36	62	82	23	55	62	16	



型号(①代码·②轴承型号)

BBBK6000ZZ

— ③h — 30

— (KCC·NA)

— KCC

可选加工	不装配轴承·挡圈	加工倒角C2
代码	NA	KCC
技术说明	不将轴承、挡圈装入固定座中，而以附件形式发货。	加工上端面倒角C2



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达