

凸轮轴承随动器 ▶ 轴承、轴承座组件

带润滑脂补充孔用安装螺纹型



型号(1)代码·(2)dh7) — (3)D
BAFURT12 — 30

■ 请按步骤①~③选择型号和参数后进行订购。





型号区分: 7 天发货

■ 圆弧型



■ 带密封圈型

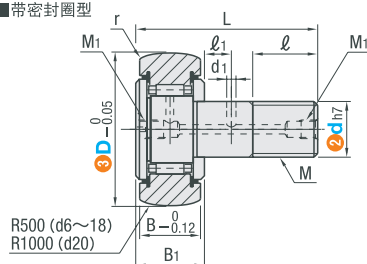



用途	代码	材质	附件
普通	BAFURT	SUJ2	1个六角螺帽(S45C·发黑)

型号		③D	M×螺距	B	B ₁	L	d ₂	ℓ	ℓ ₁	r	f (最小)	M ₁ (润滑脂补充孔)	基本额定负载	最大容许	轨道负载	极限转速(rpm)	重量 (g)		
①代码	②d _{h7} 公差												C(动)kN	Cor(静)kN	负载(kN)	带密封圈型			
BAFURT	6	$-\frac{0}{-0.012}$	16	6×1.0	11	12	28	—	9	—	0.5	11	M6×0.75*	3.59	3.58	2.11	1.08	25000	18.5
	8	$-\frac{0}{-0.015}$	19	8×1.25	11	12	32	—	11	—	0.5	13	M6×0.75*	4.17	4.65	4.73	1.37	20000	28.5
	10	$-\frac{0}{-0.015}$	22	10×1.25	12	13	36	—	13	—	1	15	M6×0.75*	5.33	6.78	5.81	1.67	17000	45
	10	$-\frac{0}{-0.015}$	26	10×1.25	14	13	36	—	13	—	1	15	M6×0.75*	5.33	6.78	5.81	2.06	17000	60
	12	$-\frac{0}{-0.018}$	30	12×1.5	14	15	40	3	14	6	1.5	20	M6×0.75	7.87	9.79	9.37	2.45	14000	95
	12	$-\frac{0}{-0.018}$	32	12×1.5	18	15	40	3	14	6	1.5	20	M6×0.75	7.87	9.79	9.37	2.74	14000	105
	16	$-\frac{0}{-0.018}$	35	16×1.5	20	19.5	52	3	18	8	1.5	24	PT1/8	12	18.3	17.3	3.14	10000	170
	18	$-\frac{0}{-0.018}$	40	18×1.5	24	21.5	58	3	20	8	1.5	26	PT1/8	14.7	25.2	26.1	3.72	8500	250
	20	$-\frac{0}{-0.021}$	52	20×1.5	24	25.5	66	4	22	9	1.5	36	PT1/8	20.7	34.8	32.1	8.23	7000	460

■ 圆柱型



■ 带密封圈型



用途	代码	材质	附件
普通	BAFURT	SUJ2	1个六角螺帽(S45C·发黑)

(*)	D	公差
	16	$-\frac{0}{-0.008}$
	19~30	$-\frac{0}{-0.009}$
	32~40	$-\frac{0}{-0.011}$
	52	$-\frac{0}{-0.013}$

型号		③D	M×螺距	B	B ₁	L	d ₂	ℓ	ℓ ₁	r	f (最小)	M ₁ (润滑脂补充孔用)	基本额定负载	最大容许	轨道负载	极限转速(rpm)	重量		
①代码	②dh7公差												C(动)kN	Cor(静)kN	负载(kN)	带密封圈型	(g)		
BAFFRT	6	$-\frac{0}{-0.012}$	16	6×1.0	11	12	28	—	9	—	0.5	11	M6×0.75*	3.59	3.58	2.11	3.43	17500	18.5
	8	$-\frac{0}{-0.015}$	19	8×1.25	11	12	32	—	11	—	0.5	13	M6×0.75*	4.17	4.65	4.73	4.02	14000	28.5
	10	$-\frac{0}{-0.015}$	22	10×1.25	12	13	36	—	13	—	1	15	M6×0.75*	5.33	6.78	5.81	4.7	11900	45
	10	$-\frac{0}{-0.015}$	26	10×1.25	14	13	36	—	13	—	1	15	M6×0.75*	5.33	6.78	5.81	5.49	11900	60
	12	$-\frac{0}{-0.018}$	30	12×1.5	14	15	40	3	14	6	1.5	20	M6×0.75	7.87	9.79	9.37	7.06	9800	95
	12	$-\frac{0}{-0.018}$	32	12×1.5	18	15	40	3	14	6	1.5	20	M6×0.75	7.87	9.79	9.37	7.45	9800	105
	16	$-\frac{0}{-0.018}$	35	16×1.5	20	19.5	52	3	18	8	1.5	24	PT1/8	12	18.3	17.3	11.2	7000	170
	18	$-\frac{0}{-0.018}$	40	18×1.5	24	21.5	58	3	20	8	1.5	26	PT1/8	14.7	25.2	26.1	14.4	5950	250
	20	$-\frac{0}{-0.021}$	52	20×1.5	24	25.5	66	4	22	9	1.5	36	PT1/8	20.7	34.8	32.1	23.2	4900	460



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达