



定位销/夹具衬套

定位销 小头圆锥型 标准型 · P尺寸固定型



型号(①代码·②D) — ③P
 DAJR SB10 — 6
 DACJR SPB12 — 8

■请按步骤①~③选择型号和参数后进行订购。



型号区分: 7天发货
 代码

定位销
夹具衬套


20



代码		材质	表面处理	硬度
D尺寸m6	D尺寸p6			
DAJR SB	DAJR SPB	SKS3	—	淬火硬度60~63HRC
DAGJR SB	DAGJR SPB	SKS3	镀硬铬 厚度3 μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACJR SB	DACJR SPB	SUS440C	—	淬火硬度50~55HRC
DASJR SB	DASJR SPB	SUS304	—	—

■D尺寸公差

D	m6	p6
3	+0.008 +0.002	+0.012 +0.006
4	+0.012 +0.004	+0.020 +0.012
5	+0.015 +0.006	+0.024 +0.015
6	+0.018 +0.007	+0.029 +0.018
8	+0.021 +0.008	+0.035 +0.022
10		
12		
13		
16		
20		

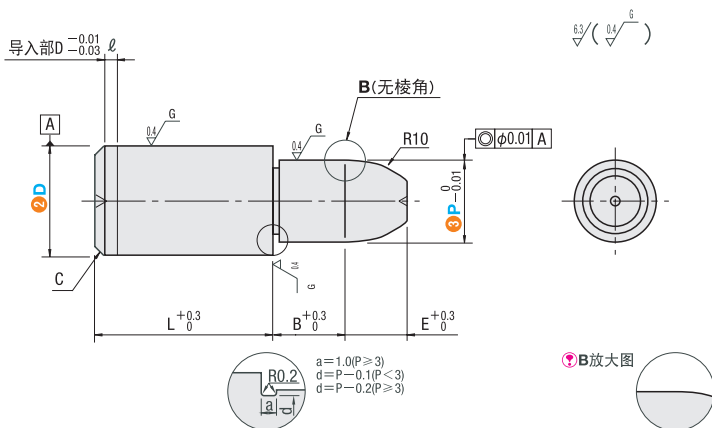

型号		③P选择	L	B	E	L	C
①代码	②D						
<m6> DAJR SB DAGJR SB DACJR SB DASJR SB	<p6>	3	5	3	3	1	0.5
		4	5	3	3	1	1
		5	10	5	4	1	1
		6	10	5	5	1	1
		8	15	6	5	1	1.5
		10	15	8	5	1	2
		12	15	8	6	1	2
		13	22	8	6	2	2
		16	22	10	7	2	3
		20	30	10	7	2	3

询价④种方式



官网 <http://www.srdfaa.com>
 深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
 客服热线 0755-27926613