



脚轮/调整块



脚轮/角材安装型 轻载型



型号 ①代码 · ②D — ③轮材质
HELJ38 — R

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④代码 7 天发货

■ 轻载型



(橡胶轮)




(尼龙轮)




(聚氨酯轮)


万向型 HELJ

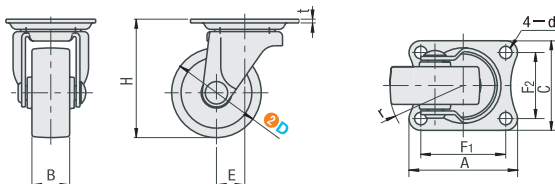

固定型 HELK

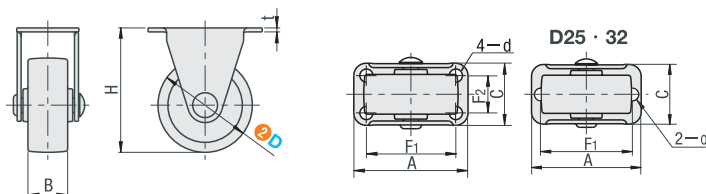

万向型 + 带挡块型 HELS

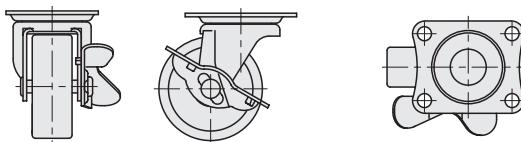

主体		轮	轴承	
材质	表面处理	材质 (颜色)	回转部	轮部
SPHC	铬酸盐光泽处理	合成橡胶(黑色)、尼龙(白色)、人造胶(灰色)、FC250(灰色)	有	无

主体 类型	型号		③轮材质	H	A	C	F	F ₂	d	B	r	E	t	容许负载 (N)				重量 (g)			
	① 代码	② D												R	N	U	G	R	N	U	G
万向型	HELJ	25	R(橡胶) N(尼龙) G(FC250) P(人造胶)	35	35	30	28	23	4.2	12	21	8	1.6	80	100	100	120	35	30	40	53
		32		42	38	32	30	24	5.3	14	27	10	1.6	120	180	180	200	50	40	50	68
		38		50	46	38	36	28	5.3	17	32	12	1.6	200	280	280	300	80	75	80	116
		50		65	59	47	46	35	6.5	20	42	16	2	300	380	380	400	140	110	119	213
		65		80	70	58	55	42	8.8	25	53	19	2.3	400	550	550	600	245	180	195	450
		75		90	70	58	55	42	8.8	26	58	19	2.3	500	650	650	700	290	195	215	555
固定型	HELK	32	P(人造胶)	42	36	20	29	—	4.2	14	—	—	1.6	120	180	180	200	38	30	40	58
		38		50	46	25	36	15	5.3	17	—	—	1.6	200	280	280	300	63	48	52	106
		50		65	58	40	45	25	6.5	20	—	—	2	300	380	380	400	130	95	110	220
		65		80	70	47	55	28	8.8	25	—	—	2.3	400	550	550	600	240	175	190	395
		75		90	70	47	55	28	8.8	26	—	—	2.3	500	650	650	700	290	195	215	530
		75		65	59	47	46	35	6.5	20	44	16	2	300	380	380	500	165	135	145	420
万向型+ 带挡块型	HELS	65	80	70	58	55	42	8.8	25	58	19	2.3	400	550	550	600	280	215	230	485	
		75	90	70	58	55	42	8.8	26	58	19	2.3	500	650	650	700	325	230	250	590	

