




■ 六角型




代码		材质	表面处理
螺纹长度固定型	螺纹长度指定型		
BDLAC	BDLNAC	S45C	发黑
BDPLAC	BDPLNAC		无电解镀锌
BDSLAC	BDSLAC	SUS304	—


D = MA 时



螺纹长度固定型

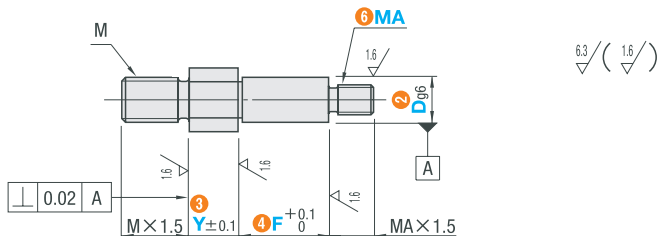

螺纹长度指定型

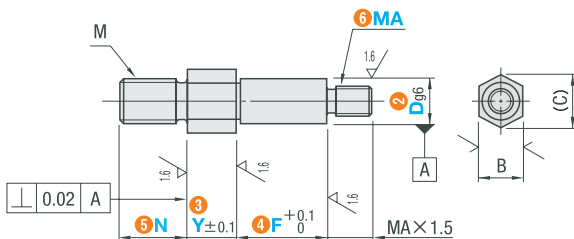

悬臂销·铰链销
支点用台阶螺丝

12

型号			最小单位 1mm			MA (粗牙螺纹) 选择			B	(C)	M (粗牙螺纹)
① 代码	② Dg6		③ Y	④ F	⑤ N						
螺纹长度 固定型 BDLAC BDPLAC BDSLAC	3	—0.002 —0.008	2~30	3~50	3~ 6	3			6	6.9	M3
	4				4~ 8	3	4	M4			
	5	—0.004 —0.012			5~10	3	4	5	7	8.1	M5
	6		6~12	4	5	6	8	9.2	M6		
螺纹长度 指定型 BDLNAC BDPLNAC BDSLAC	8	—0.005 —0.014	2~60	5~75	8~16	5	6	8	10	11.5	M8
	10				10~20	6	8	10	13	15	M10
	12	—0.006 —0.017			10~75	12~24	6	8	10	12	14
	15		8	10			12				



粗牙螺纹			
螺纹直径 (M · MA)	g	r	f
3	1.2~1.5	0.2~0.3	2.1~2.4
4			2.9~3.2
5			3.9~4.1
6			4.3~4.9
8	1.5~2.5	0.2~0.6	6.3~6.6
10			8.1~8.3
12	1.5~3.0	0.2~1.0	9.8~10.1



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达