

定位销 大头球面型

内螺纹型·P尺寸固定型

定位销/夹具衬套



定位销
夹具衬套

20



型号 (1 代码 · 2 D) — (3 P)
DASJPQTBB8 — 12

■ 请按步骤 1 ~ 3 选择型号和参数后进行订购。



型号区分: 7 天发货
代码



代码	材质	硬度
DAJPQTBB	SKS3	淬火硬度60~63HRC
DACJPQTBB	SUS440C	淬火硬度50~55HRC
DASJPQTBB	SUS304	—




$\sqrt[63]{\sqrt[0.4]{G}}$

■ D尺寸公差

D	g6
6	-0.004 -0.012
8	-0.005 -0.014
10	-0.006 -0.017
12	-0.006 -0.017
16	-0.006 -0.017

■ 内螺纹底孔深度

螺纹直径	M3	M5
底孔直径d ₂	2.6	4.3
底孔深度U	9.5	14.5

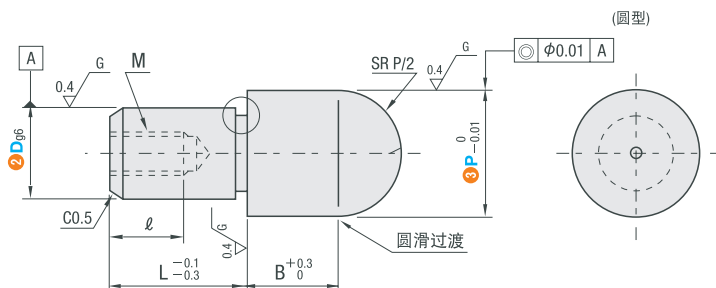

a=1.0
d=D-0.2
① 退刀部分尺寸为参考值，并非保证值。

型号		P选择								L	B	M (粗牙螺纹)	l
1 代码	2 D												
DAJPQTBB DACJPQTBB DASJPQTBB	6	7	8	9	10					10	8	M3	5
	8			9	10	11	12	13		15	8	M5	8
	10					11	12	13	15	15	10	M5	8
	12								15	15	10	M5	8
	16									22	10	M8	12



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRO仕瑞达