




■ 六角型




代码		材质	表面处理
螺纹长度固定型	螺纹长度指定型		
BDLAB	BDLNAB	S45C	发黑
BDPLAB	BDPLNAB		无电解镀镍
BDSLAB	BDSL NAB	SUS304	—

6.3/(1.6/)

螺纹长度固定型

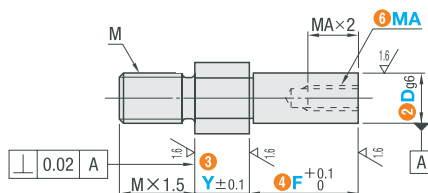


螺纹长度指定型

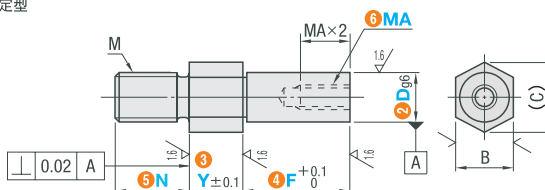

型号		最小单位 1mm			6MA (粗牙螺纹) 选择	B	(C)	M (粗牙螺纹)
① 代码	② Dg6	③ Y	④ F	⑤ N				
螺纹长度 固定型 BDLAB BDPLAB BDSLAB	6	2~60	5~100	6~12	3	8	9.2	M 6
	8			8~16	4	10	11.5	M 8
	10			10~20	4 5 6	13	15	M10
螺纹长度 指定型 BDLNAB BDPLNAB BDSL NAB	12	10~100	12~24	12~24	5 6 8	14	16.2	M12
	15				6 8 10	17	19.6	

① 外螺纹退刀槽加工尺寸



粗牙螺纹			
螺纹直径 (M)	g	r	f
6	1.5~2.5	0.2~0.6	4.3~ 4.9
8			6.3 ~ 6.6
10			8.1 ~ 8.3
12	1.5~3.0	0.2~1.0	9.8 ~10.1

