

凸头螺丝

内六角止动螺丝型/内六角螺栓型

螺丝/螺帽

螺丝·螺帽



型号 (1 代码 · 2 M) — (3 L) — 16
EBMSG5

■ 请按步骤 1 ~ 3 选择型号和参数后进行订购。



型号区分: 7 天发货
代码



凸头螺丝





代码	材质	硬度	表面处理
EBMSG	SCM435	45HRC~	发黑
EBCBG		38~43HRC	

√ (25 / 6.3 /)

EBMSG (内六角止动螺丝型)





EBCBG (内六角螺栓型)

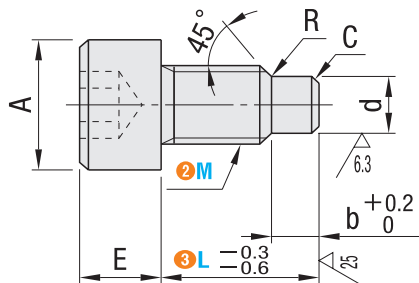

型号		③L选择					B1	B2	A	E	d		b	C	R
① 代码	②M(粗牙螺纹)										基准尺寸	公差			
EBMSG EBCBG	4	12	16	20	25	30	2	3	7	4	3	−0.1 −0.2	3	0.3	0.5
	5	12	16	20	25	30	2.5	4	8.5	5	4				
	6	12	16	20	25	30	3	5	10	6	6	−0.1 −0.3	5	0.5	
	8	16	20	25	30	35	4	6	13	8	8		6		1
	10	20	25	30	35	40	5	8	16	10	8	6	1		



型号 (1 代码 · 2 M) — (3 L) — (RS)
EBCBG8 — 20 — RS

可选加工	前端R加工型		退刀槽加工型																																					
																																								
代码	RC		RS																																					
可选加工	凸头部前端进行R加工。 ①仅EBMSG・EBCBG适用 指定方法 RC		在EBCBG的颈部加工退刀槽。 ①仅EBCBG适用 指定方法 RS																																					
	<table><tr><th>M</th><th>R</th><th>b</th></tr><tr><td>4</td><td>3</td><td>3</td></tr><tr><td>5</td><td>4</td><td>4</td></tr><tr><td>6</td><td>4</td><td>4</td></tr><tr><td>8</td><td>6</td><td>5</td></tr><tr><td>10</td><td>8</td><td>6</td></tr></table>		M	R	b	4	3	3	5	4	4	6	4	4	8	6	5	10	8	6	<table><tr><th>M</th><th>f</th><th>g</th><th>r</th></tr><tr><td>4</td><td>3.2</td><td rowspan="3">1.5</td><td rowspan="3">0.2~0.3</td></tr><tr><td>5</td><td>4.1</td></tr><tr><td>6</td><td>4.9</td></tr><tr><td>8</td><td>6.6</td><td rowspan="2">2.5</td><td rowspan="2">0.2~0.5</td></tr><tr><td>10</td><td>8.3</td></tr></table>		M	f	g	r	4	3.2	1.5	0.2~0.3	5	4.1	6	4.9	8	6.6	2.5	0.2~0.5	10	8.3
	M	R	b																																					
	4	3	3																																					
	5	4	4																																					
	6	4	4																																					
8	6	5																																						
10	8	6																																						
M	f	g	r																																					
4	3.2	1.5	0.2~0.3																																					
5	4.1																																							
6	4.9																																							
8	6.6	2.5	0.2~0.5																																					
10	8.3																																							



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达