



型号


BA51100
BAA0414

型号区分:

5 天发货

代码

■止推滚珠轴承

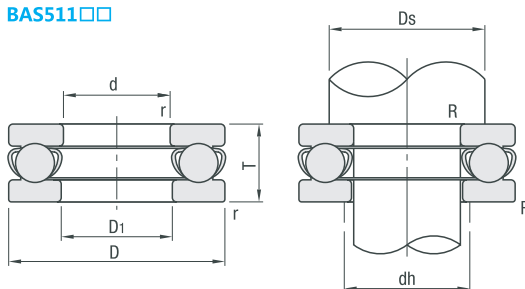BA511□□ BAS511□□
BA512□□

材质 钢型 SUJ2
不锈钢型 SUS440C
轴承精度 GB 307 P0
JIS B 1514 0级

型号		d	D	D ₁ (min.)	T	r (min.)	基本额定负载				容许转速 rpm (参考)	安装尺寸			重量 (g) (参考)				
钢型	不锈钢型						容差	容差	Ca(动) kN	Coa(静) kN		Ca(动) kN	Coa(静) kN	Ds (min.)	dh (max.)	R (max.)	钢型	不锈钢型	
BA51100	BAS51100	10	0 -0.008	24	0 -0.013	11	0 -0.075	0.3	10.1	14	5	6.96	6700	18	16	0.3	19	21	
BA51200	—			26		12		11	0.6	12.8	17.1	—	—	6000		20	0.6	28	—
BA51101	BAS51101	12		26		13		9	0.3	10.4	15.4	5.15	7.7	6700	22	18	0.3	21	23
BA51201	—			28		14		11	0.6	13.3	19	—	—	5600			0.6	31	—
BA51102	BAS51102	15	28	16	9	0.3	10.6	16.8	5.25	8.38	6300	23	20	0.3	23	24			
BA51202	—		32	17	12	0.6	16.7	24.8	—	—	5000	25	22	0.6	43	—			
BA51103	BAS51103	17	30	18	9	0.3	11.4	19.5	5.39	9.07	6000			0.3	25	26			
BA51203	—		35	19	12	0.6	17.3	27.3	—	—	4800	28	24	0.6	50	—			
BA51104	BAS51104	20	0 -0.016	35	0 -0.075	21	0.6	0.3	15.1	26.6	7.11	12.36	5300	29	26	0.3	37	40	
BA51204	—			40		22		14	0.6	22.5	37.5	—	—	4300	32	28	77	—	
BA51105	BAS51105	25		42		26		11	19.7	37	9.76	18.63	4800	35	32	56	60		
BA51105	—			47		27		15	28	50.5	—	—	3800	38	34	0.6	111	—	
BA51106	BAS51106	30	0 -0.019	32	0.6	20.6	42	10.2	21.08	4300	40	37	64	69					
BA51206	—			52		32	16	29.5	58	—	—	3400	43	39	137	—			


■止推滚针轴承



BAA□□□

带保持器止推滚针

止推圈

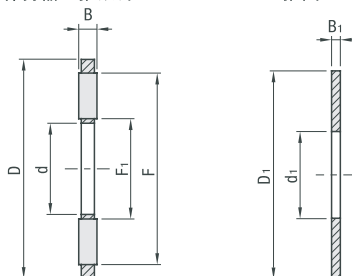

材 质 SUJ2
轴承精度 GB 307 P0
JIS B 1514 0级

型号	带保持器止推滚针										止推圈×2				容许转速 rpm (参考)	重量 (g) (参考)	基本动态 额定负载 Ca kN	基本静态 额定负载 Coa kN
	d	公差	D	公差	B	公差	F	F1	d1	公差	D1	公差	B1	公差				
BAA0414	4		14	-0.095	2	0 -0.01	13	5	4	+0.200 +0.020	14	-0.032	1	+0.05 -0.05	5200	2.7	4.4	8
BAA0515	5	+0.140	15	-0.365			14	6	5		15	-0.302			5200	2.8	4.75	9.2
BAA0619	6	+0.020	19	-0.110			18	7	6		19				4700	5	6.8	15.5
BAA0821	8	+0.175	21	-0.440			20	9	8		21				4500	6	7.8	19.4
BAA1024	10	+0.025	24				23	12	10		24	-0.040			4200	9	9.2	25.5
BAA1226	12		26	-0.110			25	14	12		26	-0.370			3700	10	9.9	29.0
BAA1528	15	+0.212	28	-0.440			27	17	15		28				3200	12	11.3	36.0
BAA1730	17	+0.032	30				29	19	17		30				3000	15	11.9	39.5
BAA2035	20		35	-0.120 -0.510			34	22	20		35	-0.050			2500	21	14.7	58.0
BAA2542	25	+0.250	42	-0.130			41	29	25		42	-0.440			2100	24	16.3	70.0
BAA3047	30	+0.004	47	-0.520			46	34	30		47				1800			



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达