



轴承、轴承座组件




带座轴承

无挡圈双轴承L尺寸指定型



代码			材质		表面处理
圆型	方型	简易型	轴承	固定座	固定座
BBFFCB	BBFKCB	BBFHCB	钢	S45C	发黑
BBFFC	BBFKC	BBFHC			无电镀镍
BBAFFC	—	BBAFHC			—
BBSAFFC	—	—	不锈钢	铝合金	本色阳极氧化处理
BBSFFC	BBSFKC	BBSFHC		SUS304	—

63 (16/)

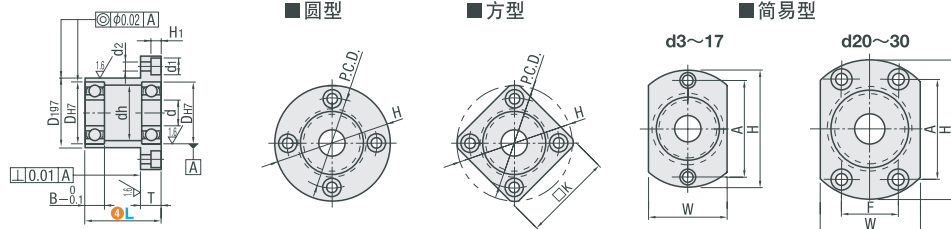

型号 (1 代码 · 2 轴承型号 · 3 密封圈) — 4 L
BBFHC628ZZ — 38

■ 请按步骤 1~4 选择型号和参数后进行订购。



型号区分: 7 天发货
交货期 代码

1 代码	2 轴承型号	3 密封圈	4 L 指定单位 1mm	d	DH7	公差	B	H	W	T	dh	D197	公差	P.C.D.	K	A	F	d1	d2	H1	可订购型号
(圆型)	623	ZZ (双盖式)	20~40	3	10	+0.015 0	4	33	16	7	7	14	-0.006 -0.024	24	27	24	6.5	3.5	3.1	●	—
	624			4	13	0	5	35	18	10	9	17	-0.006 -0.024	26	28	26	8	4.5	4.1	●	—
	605			5	14	+0.018 0	5	36	20	12	10	18	-0.007 -0.028	26	30	26	8	4.5	4.1	●	—
	625			6	16	0	5	38	22	13	12	20	-0.007 -0.028	28	31	28	8	4.5	4.1	●	—
	606			7	17	0	6	39	23	15	13	21	-0.007 -0.028	29	32	29	8	4.5	4.1	●	—
	626			8	19	+0.021 0	6	41	25	15	15	24	-0.006 -0.024	31	34	31	8	4.5	4.1	●	—
	678			12	12	+0.018 0	3.5	34	18	10	10	16	-0.006 -0.024	25	27	25	6.5	3.5	3.1	●	—
	698			19	19	0	6	41	25	15	15	24	-0.006 -0.024	31	34	31	6.5	3.5	3.1	●	—
	608			22	22	+0.021 0	7	45	29	18	18	27	-0.007 -0.028	35	36	35	8	4.5	4.1	●	—
	628			24	24	0	8	47	32	20	20	30	-0.007 -0.028	37	37	37	8	4.5	4.1	●	—
	6700			15	15	+0.018 0	4	37	22	12	12	19	-0.007 -0.028	27	30	27	8	4.5	4.1	●	—
(方型)	6900	VV (非接触式 橡胶密封圈)	25~60	19	22	+0.021 0	5	41	25	15	15	24	-0.009 -0.034	40	39	40	8	4.5	4.1	●	—
	6000			26	26	0	8	50	34	22	22	32	-0.009 -0.034	44	42	44	8	4.5	4.1	●	—
	6200			30	30	0	9	54	38	24	24	36	-0.009 -0.034	44	42	44	8	4.5	4.1	●	—
	6701			18	18	+0.018 0	4	40	25	15	15	23	-0.007 -0.028	30	31	30	8	4.5	4.1	●	—
	BBFFCB			21	21	0	5	44	29	17	17	26	-0.007 -0.028	34	35	34	8	4.5	4.1	●	—
	BBFFC			24	24	+0.021 0	6	48	31	21	21	30	-0.009 -0.034	38	38	38	8	4.5	4.1	●	—
	BBAFFC			28	28	0	8	52	36	24	24	34	-0.009 -0.034	42	40	42	8	4.5	4.1	●	—
	BBSAFFC			32	32	+0.025 0	10	56	40	26	26	38	-0.009 -0.034	46	43	46	8	4.5	4.1	●	—
	BBSFFC			21	21	+0.021 0	4	44	29	18	18	26	-0.007 -0.028	34	35	34	8	4.5	4.1	●	—
	6902			24	24	0	5	47	32	20	20	30	-0.007 -0.028	37	37	37	8	4.5	4.1	●	—
	BBFKCB			28	28	+0.025 0	7	57	37	25	25	35	-0.010 -0.040	45	45	45	8	4.5	4.1	●	—
	BBFKC			32	32	0	9	60	40	28	28	38	-0.010 -0.040	48	46	48	8	4.5	4.1	●	—
(简易型)	6903	DD (接触式 橡胶密封圈)	35~70	35	35	+0.021 0	11	64	44	29	29	42	-0.009 -0.034	52	49	52	9.5	5.5	5.1	●	—
	6903			26	26	+0.021 0	5	50	34	22	22	32	-0.009 -0.034	40	39	40	8	4.5	4.1	●	—
	6903			30	30	0	7	60	38	27	27	36	-0.009 -0.034	48	46	48	8	4.5	4.1	●	—
	BBSFKC			35	35	+0.025 0	10	66	44	31	31	42	-0.009 -0.034	54	50	54	9.5	5.5	5.1	●	—
	6003			40	40	0	12	72	50	34	34	48	-0.010 -0.040	60	54	60	9.5	5.5	5.1	●	—
	6203			27	27	+0.021 0	4	51	35	23	23	33	-0.010 -0.040	41	39	41	8	4.5	4.1	●	—
	6704			32	32	0	7	60	40	28	28	38	-0.010 -0.040	48	46	48	8	4.5	4.1	●	—
	BBFHCB			37	37	0	9	69	47	34	34	45	-0.010 -0.040	56	54	56	9.5	5.5	5.1	●	—
	BBFHC			42	42	+0.025 0	12	77	54	36	36	50	-0.010 -0.040	64	59	64	11	6.6	6.1	●	—
	6004			14	14	0	4	81	58	40	40	54	-0.010 -0.040	68	62	68	11	6.6	6.1	●	—
	6204			37	37	0	7	69	47	34	34	45	-0.009 -0.034	56	54	56	11	6.6	6.1	●	—
	BBAFHC			42	42	0	9	77	54	36	36	50	-0.010 -0.040	64	59	64	11	6.6	6.1	●	—
(双盖式)	6905	ZZ (双盖式)	45~80	47	47	0	12	88	58	41	41	54	-0.010 -0.040	72	67	72	14	9	8.1	●	—
	6905			52	52	+0.030 0	15	94	64	45	45	60	-0.010 -0.040	78	72	78	14	9	8.1	●	—
	6005			42	42	+0.025 0	7	77	54	36	36	50	-0.009 -0.034	64	59	64	11	6.6	6.1	●	—
	6205			47	47	0	9	88	58	41	41	54	-0.010 -0.040	72	67	72	11	6.6	6.1	●	—
	6906			55	55	0	13	96	66	48	48	62	-0.010 -0.040	80	73	80	14	9	8.1	●	—
	6006			62	62	0	16	104	74	55	55	70	-0.010 -0.040	88	79	88	14	9	8.1	●	—
	6206			62	62	0	16	104	74	55	55	70	-0.010 -0.040	88	79	88	14	9	8.1	●	—
	6007			72	72	+0.030 0	17	126	88	64	64	84	-0.012 -0.047	105	95	105	17.5	11	11	●	—
	6207			15	15	0	11	114	82	60	60	78	-0.010 -0.040	96	86	96	14	9	8.1	●	—
	6008			78	78	0	18	134	96	74	74	92	-0.012 -0.047	113	102	113	17.5	11	11	●	—
	6208			80	80	0	18	134	96	74	74	92	-0.012 -0.047	113	102	113	17.5	11	11	●	—
	6010			90	90	+0.035 0	20	147	110	83	83	106	-0.012 -0.047	126	111	126	17.5	11	11	●	—



型号 (1 代码 · 2 轴承型号 · 3 密封圈) — 4 L — (NA)
BBSFHC6200ZZ — 30 — NA

可选加工	不装配轴承
代码	NA
技术说明	不将轴承装入固定座中，而以附件形式发货。

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613