




代码			材质		表面处理
圆型	方型	简易型	轴承	固定座	固定座
BBFFCB	BBFKCB	BBFHCB	钢	S45C	发黑
BBFFC	BBFKC	BBFHC			无电解镀锌
BBAFFC	—	BBAFHC			本色阳极氧化处理
BBSAFFC	—	—	不锈钢	SUS304	—
BBSFFC	BBSFKC	BBSFHC			



6.3/(1.6)

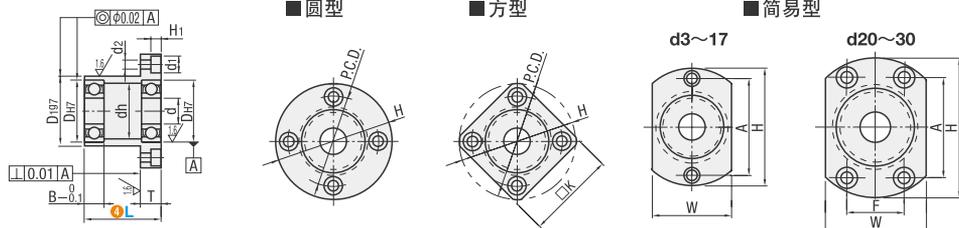

型号(1)代码·(2)轴承型号·(3)密封圈 — (4)L
BBFHC628ZZ — 38

■ 请按步骤①~④选择型号和参数后进行订购。



型号区分: 代码 7 天发货

① 代码	② 轴承型号	③ 密封圈	④ L 指定单位 mm	d	Dh7	公差	B	H	W	T	dh	D197	公差	P.C.D.	K	A	F	d1	d2	H1	可订购型号			
																					BBFFCB	BBFFC	BBFHCB	BBFHC
(圆型)	623	ZZ (双盖式)	20~40	3	10	+0.015 0	4	33	16	7	7	14	-0.006 -0.024	24	27	24	6.5	3.5	3.1	●	●	●	●	
	624			4	13		5	35	18		9	17		26	28	26		●	●	●	●			
	605			5	14	+0.018 0	5	36	20		10	18		26	30	26		●	●	●	●			
	625			5	16		5	38	22		12	20		28	31	28		●	●	●	●			
	606			5	17		6	39	23		13	21	-0.007 -0.028	29	32	29		●	●	●	●			
	626			6	19	+0.021 0	6	41	25		15	24		31	34	31		●	●	●	●			
	678			6	12	+0.018 0	3.5	34	18		10	16	-0.006 -0.024	25	27	25		●	●	●	●			
	698			8	19		6	41	25		15	24		31	34	31		●	●	●	●			
	608			8	22	+0.021 0	7	45	29		18	27		35	36	35		●	●	●	●			
	628			8	24		8	47	32		20	30	-0.007 -0.028	37	37	37		●	●	●	●			
	6700			8	15	+0.018 0	4	37	22		12	19		27	30	27		●	●	●	●			
	6800			8	19		5	41	25		15	24		31	34	31		●	●	●	●			
6900	8	22	+0.021 0	6	45	29	19	27		35	36	35	●	●	●	●								
6000	8	26	0	8	50	34	22	32	-0.009 -0.034	40	39	40	●	●	●	●								
6200	8	30		9	54	38	24	36		44	42	44	●	●	●	●								
6701	8	18	+0.018 0	4	40	25	15	23		30	31	30	●	●	●	●								
6801	8	21		5	44	29	17	26	-0.007 -0.028	34	35	34	●	●	●	●								
6901	8	24	+0.021 0	6	48	31	21	30		38	38	38	●	●	●	●								
6001	8	28	0	8	52	36	24	34	-0.009 -0.034	42	40	42	●	●	●	●								
6201	8	32	+0.025 0	10	56	40	26	38		46	43	46	●	●	●	●								
6702	8	21		4	44	29	18	26	-0.007 -0.028	34	35	34	●	●	●	●								
6802	8	24	+0.021 0	5	47	32	20	30		37	37	37	●	●	●	●								
6002	8	28	0	7	57	37	25	35	-0.009 -0.034	45	45	45	●	●	●	●								
6202	8	32	+0.025 0	9	60	40	28	38		48	46	48	●	●	●	●								
6803	8	35	0	11	64	44	29	42		52	49	52	●	●	●	●								
6903	8	26	+0.021 0	5	50	34	22	32		40	39	40	●	●	●	●								
6003	8	30	0	7	60	38	27	36	-0.009 -0.034	48	46	48	●	●	●	●								
6203	8	35	+0.025 0	10	66	44	31	42		54	50	54	●	●	●	●								
6704	8	40	0	12	72	50	34	48		60	54	60	●	●	●	●								
6804	8	27	+0.021 0	4	51	35	23	33		41	39	32	25	8	4.5	4.1	●	●	●	●				
6904	8	32		7	60	40	28	38		48	46	38	29	9.5	5.5	5.1	●	●	●	●				
6004	8	37	0	9	69	47	34	45	-0.010 -0.040	68	62	59	34	11	6.6	6.1	●	●	●	●				
6204	8	42	+0.025 0	14	81	58	41	54		56	54	51	24	●	●	●	●	●	●	●				
6805	8	37		7	69	47	36	50	-0.034	64	59	56	32	●	●	●	●	●	●	●				
6905	8	42	0	9	77	54	36	50		64	59	56	32	●	●	●	●	●	●	●				
6005	8	47		12	88	58	41	54	-0.010 -0.040	72	67	63	36	14	9	8.1	●	●	●	●	●			
6205	8	52	+0.030 0	15	94	64	45	60		78	72	68	39	●	●	●	●	●	●	●	●			
6806	8	42	+0.025 0	7	77	54	36	50	-0.009 -0.034	64	59	56	32	11	6.6	6.1	●	●	●	●	●			
6906	8	47	0	9	88	58	41	54		72	67	63	36	●	●	●	●	●	●	●	●			
6006	8	55		13	96	66	48	62	-0.010 -0.040	80	73	70	40	●	●	●	●	●	●	●	●			
6206	8	62	0	16	104	74	55	70		88	79	77	44	14	9	8.1	●	●	●	●	●			
6007	8	62		14	104	74	55	70		88	79	75	44	●	●	●	●	●	●	●	●			
6207	8	72	+0.030 0	17	126	88	64	84	-0.012 -0.047	105	95	92	51	17.5	11	11	●	●	●	●	●			
6008	8	68	0	15	114	82	60	78		96	86	80	54	14	9	8.1	●	●	●	●	●			
6208	8	80		18	134	96	74	92	-0.010 -0.040	113	102	98	56	●	●	●	●	●	●	●	●			
6010	8	80	0	16	134	96	74	92		113	—	98	56	●	●	●	●	●	●	●	●			
6210	8	90	+0.035 0	20	147	110	83	106	-0.012 -0.047	126	—	104	72	17.5	11	11	●	●	●	●	●			



型号(1)代码·(2)轴承型号·(3)密封圈 — (4)L — (NA)
BBSFHC6200ZZ — 30 — NA

可选加工	不装配轴承
代码	NA
技术说明	不将轴承装入固定座中，而以附件形式发货。

