




代码		材质		表面处理	附件
高度h选择型	高度h指定型	轴承	固定座	固定座	挡圈
BBLKB	BBLFB	钢	S45C	发黑	弹簧钢
BBLK	BBLF			无电解镀铬	
BBLKSA	—			本色阳极氧化处理	
		不锈钢	铝合金		SUS304

6.3/(1.6/)

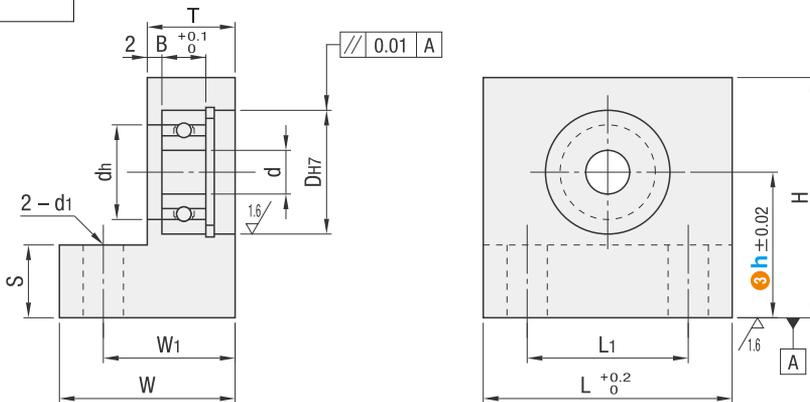

型号(①代码·②轴承型号) — ③h
BBLK600ZZ — 30

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④代码 7天发货

轴承/关节轴承/轴承座组件

型号		③h		d	H	L1	d1	L	W1	W	T	S	dh	DH7	B
①代码	②轴承型号	高度选择型	高度指定型 单位1mm												
高度h选择型 BBLKB BBLK BBLKSA	623ZZ	15 20 25	15~30	3	h+9	10	4.5	20	15	20	10	5	7	10	4
	624ZZ			4	h+11	12		22	15	20	10		9	13	5
	605ZZ			5	h+11	14		24	15	20	10		10	14	5
	625ZZ			5	h+12	16		28	16	22	10		12	16	5
	606ZZ			6	h+13	22		34	18	24	12		13	17	6
	626ZZ	6	h+14	24	36	18	24	12	15	19	6				
	608ZZ	8	h+15	26	38	18	24	12	18	22	7				
	628ZZ	8	h+16	22	34	21	27	15	20	24	8				
	6900ZZ	10	h+15	20	32	18	24	12	19	22	6				
	6000ZZ	10	h+17	26	38	21	27	15	22	26	8				
6200ZZ	10	h+19	28	40	21	27	15	24	30	9					
6901ZZ	12	h+16	24	36	18	24	12	21	24	6					
6001ZZ	12	h+18	28	40	21	27	15	24	28	8					
6201ZZ	12	h+20	30	42	22	28	16	26	32	10					
6902ZZ	15	h+18	30	42	18	24	12	25	28	7					
6002ZZ	15	h+20	36	50	22	29	15	28	32	9					
6202ZZ	15	h+22	30	44	24	31	17	29	35	11					
6903ZZ	17	h+19	30	42	20	26	13	27	30	7					
6003ZZ	17	h+22	36	50	24	31	16	31	35	10					
6203ZZ	17	h+24	36	48	26	33	20	34	40	12					
6904ZZ	20	h+23	31	45	22	29	15	34	37	9					
6004ZZ	20	h+25	38	54	27	35	19	36	42	12					
6204ZZ	20	h+28	44	60	28	36	20	40	47	14					
6005ZZ	25	h+28	46	62	27	35	19	41	47	12					
6205ZZ	25	h+31	50	70	32	42	22	45	52	15					
6006ZZ	30	h+32	54	74	30	40	20	48	55	13					
6206ZZ	30	h+36	62	82	33	43	23	55	62	16					



型号(①代码·②轴承型号) — ③h — (KKC·KCC·NA)
BBLF600ZZ — 30 — KKC

可选加工	加工倒角C	加工倒角C2	不装配轴承·挡圈
代码	KKC	KCC	NA
技术说明	加工上端两侧倒角C(45°) 指定方法 ①仅高度h指定型适用	加工上端面倒角C2	不将轴承、挡圈装入固定座中，而以附件形式发货。



邮箱: Service@srdfaa.com



传真: 0755-8957-5523

SRD仕瑞达