



链轮/链条

【传动用】双排链轮

40B·50B系列 / 08A / 10A

链轮·链条


19



■轴孔加工尺寸表

轴孔直径D	键槽b2×t2	固定螺丝M
15	5×2.3	6
18·20	6×2.8	6
25~30	8×3.3	8
35	10×3.3	8
40	12×3.3	8

代码	材质	附件
CE40SD	S45C	固定螺丝
CE50SD	(齿顶高频淬火)	(仅轴孔规格N)

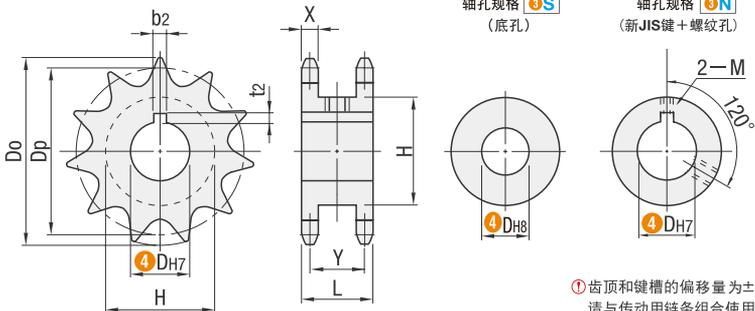

①齿顶和键槽的偏移量为±0.5mm
请与传动用链条组合使用。



链轮

型号(①代码·②齿数) - ③轴孔规格 - ④轴孔直径
CE40SD16 - N - 20

■请按步骤①~④选择
型号和参数后进行订购。



型号区分:

代码

7天发货

■40B系列

型号		③轴孔规格	④轴孔直径				Dp	Do	毂		X	Y	
①代码	②齿数		S规格 (Dh8)	N规格 (Dh7)					H	L			
CE40SD	12	S N	10	15	18		49.07	55	34	35	7.2	27.8	
	13			18	20		53.07	59	38				
	14			13	18	20		57.07	63				42
	15			13	20	25		61.08	67				46
	16			13	20	25		65.10	71				50
	17			13	25	28	30	69.12	76				54
	18			13	25	28	30	73.14	80				59
	19			13	25	28	30	77.16	84				63
	20			13	25	28	30	81.18	88				67
	21			13	25	28	30	85.21	92				71

■50B系列

型号		③轴孔规格	④轴孔直径				Dp	Do	毂		X	Y		
①代码	②齿数		S规格 (Dh8)	N规格 (Dh7)					H	L				
CE50SD	12	S N	13	18	20		61.34	69	43	40	8.7	31.3		
	13			20	25	28		66.34	74				48	
	14			13	20	25	28	30	71.34				79	53
	15			13	20	25	28	30	76.35				84	58
	16			13	25	28	30	35	81.37				89	63
	17			13	25	28	30	35	86.39				94	68
	18			13	25	28	30	35	91.42				100	73
	19			16	25	28	30	35	96.45				105	79
	20			16	25	28	30	35	101.48				110	84
	21			16	28	30	35	40	106.51				115	89

询价④种方式



官网 <http://www.srdfaa.com>
深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613