



弹簧/氮气弹簧

拉伸弹簧

中重载·重载型




型号(①代码·②D) — ③L
LBAT10 — 50

■请按步骤①~③选择型号和参数后进行订购。



型号区分: ④ 5 天发货

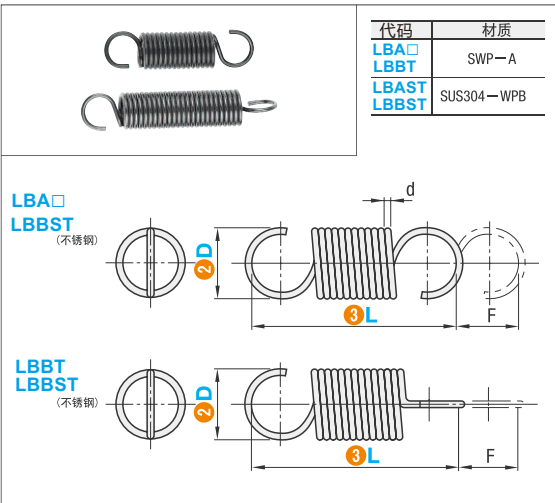

■中重载型

型号		线径 dmm	动态负载时		(初始张力) N	(弹簧 常数) N/mm
① 代码	② D-③ L		最大 位移量 Fmax. mm	最大 负载 N		
LBAF	3-10	0.45	2.2	6.47	1.57	2.26
	15	0.45	4.5	6.47	1.57	1.08
	20	0.45	6.7	6.47	1.57	0.74
	25	0.45	9.1	6.47	1.57	0.54
	30	0.45	11.4	6.47	1.57	0.43
	4-15	0.55	4.5	8.43	1.86	1.47
	20	0.55	7.1	8.43	1.86	0.93
	25	0.55	10	8.43	1.86	0.66
	30	0.55	12.6	8.43	1.86	0.52
	35	0.55	15.2	8.43	1.86	0.43
	40	0.55	18.1	8.43	1.86	0.36
	5-15	0.7	3.9	14.71	2.45	3.14
	20	0.7	6.9	14.71	2.45	1.77
	25	0.7	9.6	14.71	2.45	1.28
	30	0.7	12.5	14.71	2.45	0.98
	35	0.7	15.6	14.71	2.45	0.78
	40	0.7	19.2	14.71	2.45	0.64
	45	0.7	21.9	14.71	2.45	0.56
	50	0.7	25	14.71	2.45	0.49
	6-20	0.9	3.9	23.54	5.88	4.51
	25	0.9	6	23.54	5.88	2.94
	30	0.9	7.8	23.54	5.88	2.26
	35	0.9	10	23.54	5.88	1.77
	40	0.9	12	23.54	5.88	1.47
	45	0.9	13.8	23.54	5.88	1.28
	50	0.9	16.4	23.54	5.88	1.08
	55	0.9	18	23.54	5.88	0.98
	60	0.9	20	23.54	5.88	0.88
	8-25	1.1	5.8	31.38	6.86	4.23
	30	1.1	8.3	31.38	6.86	2.94
	35	1.1	10.9	31.38	6.86	2.26
	40	1.1	13.2	31.38	6.86	1.86
	45	1.1	15.6	31.38	6.86	1.57
	50	1.1	18.5	31.38	6.86	1.32
	55	1.1	21.7	31.38	6.86	1.13
	60	1.1	23.8	31.38	6.86	1.03
	65	1.1	26.3	31.38	6.86	0.93
	70	1.1	27.8	31.38	6.86	0.88
	10-30	1.4	6.5	49.03	12.75	5.58
	35	1.4	8.7	49.03	12.75	4.17
40	1.4	10.7	49.03	12.75	3.39	
45	1.4	12.9	49.03	12.75	2.81	
50	1.4	15.2	49.03	12.75	2.39	
55	1.4	17.2	49.03	12.75	2.11	
60	1.4	19.5	49.03	12.75	1.86	
70	1.4	23.1	49.03	12.75	1.57	
80	1.4	27.4	49.03	12.75	1.32	
90	1.4	32.1	49.03	12.75	1.13	
100	1.4	46.2	49.03	12.75	0.79	
12-35	1.8	5	83.36	23.54	12	
40	1.8	7	83.36	23.54	8.55	
45	1.8	9	83.36	23.54	6.65	
50	1.8	11	83.36	23.54	5.44	
55	1.8	13	83.36	23.54	4.6	
60	1.8	14.5	83.36	23.54	4.13	
70	1.8	17.8	83.36	23.54	3.36	
80	1.8	21.3	83.36	23.54	2.81	
90	1.8	24.5	83.36	23.54	2.44	
100	1.8	27.5	83.36	23.54	2.18	